


2015/16 TYRE CATALOGUE

TRUCK AND BUS



ZHONGCE RUBBER GROUP CO., LTD.

www.zc-rubber.com



- A Company established in Year 1958
- No. 1 Tyre Manufacturer in China
- No. 10 of Top 75 Global Tyre Manufacturers in Year 2014
- Sale revenue reached USD4.53 billion in Year 2013

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities such as the first noise test laboratory in China and the MTS Flat-Trac III CT tyre Test

System. Since 2012, we joined and maintained the rank of the global top 10 tyre manufacturer.

Our belief in producing quality tyres makes us to set up quality control system approved by both global tyre manufacturers and the famous car makers such as VOLVO, introduce world latest production facilities from Fischer, VMI, Krupp, etc, and inspect every single tyre by hand before it leaves the production line besides the X-ray, balancing and uniformity inspection by most advanced equipments imported from Germany, Japan and U.S.A. We guarantee our tyre quality by system, facilities and employees' responsibility.

Manufacturing Bases



PCR & LTR Plant in Xiasha



TBR Plant in Xiasha



Rubber Products Plant in Yonggu



Bias Tyre Plant in Xinanjiang

Advanced Production Facility



Extruding Machine



Germany Fischer Cutting Machine



Germany Krupp Building Machine



Hydraulic Tyre Curing Machine Press

Strict Quality Inspection



ASTEC Tyre Uniformity Testing Machine



Y.MITS Tyre X-ray Inspection Machine



Manual Inspection

R&D Center



VMI Tread Waring Test



Noise Analysis Laboratory



Flat-Trac Test System



Bead Unseating Test





CONTENTS

TRUCK & BUS RADIAL	07 - 45
Long Haul	07 - 18
Regional	19 - 30
Mixed Service	31 - 41
Urban	42 - 43
Winter	44 - 45
TRUCK & BUS BIAS	46 - 53
LIGHT TRUCK BIAS	54 - 62

RECOMMENDATION CHART

ROAD		POSITION	AP/STEER	DRIVE	TRAILER
LONG HAUL			    	    	  
			  	   	  
REGIONAL			   	    	 
			    	   	
MIXED SERVICE		ON & OFF	    	 	
		MINING	   		
URBAN			    		
			 		
WINTER			 		
			 		

- L

 - Long distance journey with constant speed and less braking and accelerating
 - Less fuel consumption and comfortable ride
 - High mileage performance
- M

 - Used both on and off road
 - Heavy loads and outstanding durability
 - Special protection against the damage caused by the road condition
- R

 - Shorter journey with frequent braking, accelerating and turning
 - Improved road grip with maximum mileage
 - Exceptional tough tyres
- U

 - Frequent speed changes and turning
 - Resistance to curb impact
 - Excellent road grip and durable high mileage

APPLICATION AND KEY FEATURE LEGEND

Long Haul

L



Regional

R



Mixed Service

M



Urban

U



Winter

W





L

Long Haul



- Premium five-rib tread provides outstanding handling for steer application
- Decoupling grooves prevent uneven tread wear and ensure long tread life for long distance travelling
- Wide and deep tread guarantee longer mileage with affordable cost and remarkable value



AS668

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
10.00R20	H/16	146/143K	17.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	17.0	7.5	1054	278	3250	930	3000	930
11R22.5	G/14	144/142M	17.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145L	17.0	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	17.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	17.5	9.00	1085	300	3550	930	3250	930
13R22.5	J/18	156/151K	18.0	9.75	1124	320	4000	875	3450	875
295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	J/18	154/151M(156/150L)	16.5	9.00	1076	312	3750	830	3450	830



- Premium five-rib tread with various pitches to provide quiet and comfortable riding
- Stone ejection design reduces stone retention and casing penetration
- Computer aided casing design helps improve footprint for better mileage performance



AZ670

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11R22.5	G/14	144/142M	16.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	16.0	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	16.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900
255/70R22.5	H/16	140/137M	15.0	7.50	930	255	2500	830	2300	830



L

Long Haul

- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance



L Long Haul



L Long Haul



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Stone ejector platforms prevent stones from lodging in grooves and drilling into belts
- Shallower tread depth helps to resist treadsquirm and irregular wear forces for exceptionally long mileage



CR976A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
9.00R20	G/14	141/139K	14.5	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	14.5	7.0	1019	259	2800	900	2650	900
9.00R20	H/16	144/142L	14.5	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	15.0	7.5	1054	278	3000	830	2725	830
10.00R20	H/16	146/143L	15.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	15.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	15.5	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	15.5	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	17.0	8.5	1125	315	3750	830	3450	830
11R22.5	F12++	140/138M	15.5	8.25	1054	279	2500	620	2360	620
11R22.5	G/14	144/142M	15.5	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	15.5	8.25	1054	279	3150	850	2900	850
11R22.5	H/16+	148/145M	15.5	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	15.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930
275/80R22.5	H/16	149/146M	14.0	8.25	1012	276	3250	850	3000	850
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	16.0	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	16.0	9.00	1076	312	4125	900	3750	900
215/75R17.5	G/14	126/124M	12.5	6.00	767	211	1700	760	1600	760
215/75R17.5	H/16	135/133J	12.5	6.00	767	211	2180	850	2060	850
225/70R19.5	F12	125/123M	13.0	6.75	811	226	1650	660	1550	660
225/70R19.5	G/14	128/126M	13.0	6.75	811	226	1800	760	1700	760
245/70R19.5	G/14	133/131M	13.0	7.50	839	248	2060	760	1950	760
245/70R19.5	H/16	136/134M	13.0	7.50	839	248	2240	830	2120	830
255/70R22.5	H/16	140/137M	14.5	7.50	930	255	2500	830	2300	830
265/70R19.5	G/14	137/134M	14.0	7.50	867	262	2300	760	2120	760
265/70R19.5	H/16	140/138M	14.0	7.50	867	262	2500	775	2360	775
265/70R19.5	J/18	143/141J	14.0	7.50	867	262	2725	850	2575	850
275/70R22.5	H/16	148/145M	14.0	8.25	958	276	3150	900	2900	900
275/70R22.5	J/18	152/148J	14.0	8.25	958	276	3550	930	3150	930
385/65R22.5	J/18	158L(160K)	15.5	11.75	1072	389	4250	850	-	-
385/65R22.5	L/20	160K(158L)	15.5	11.75	1072	389	4500	900	-	-
425/65R22.5	L/20	165K	15.0	13.00	1124	430	5150	830	-	-
445/65R22.5	L/20	169K	15.0	13.00	1150	444	5800	900	-	-



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Solid shoulder helps to minimize shoulder wear and improve cost per mile
- Advanced cool-running tread compounds reduces heat generated and increases irregular wear resistance resulting in higher mileage



CR966

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11R22.5	G/14	144/142M	15.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	15.0	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	15.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	16.0	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	16.0	9.00	1076	312	4125	900	3750	900
295/60R22.5	H/16	144/141M	15.0	9.00	926	292	2800	830	2575	830
295/60R22.5	J/18	150/147L	15.0	9.00	926	292	3350	900	3075	900
315/60R22.5	J/18	152/148M	15.0	9.75	950	313	3550	900	3150	900
385/55R22.5	L/20	160K(158L)	15.0	12.25	996	386	4500	900	-	-



- Wider tread spreads load over a larger area, promoting long, even wear in steer and free-rolling wheel position
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads
- Decoupling tread design suitable for long-distance travelling



CR960

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11R22.5	G/14	144/142L	14.2	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	14.2	8.25	1054	279	3150	850	2900	850
11R24.5	G/14	146/143L	14.2	8.25	1104	279	3000	720	2725	720
11R24.5	H/16	149/146L	14.2	8.25	1104	279	3250	830	3000	830
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	15.0	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	900	3750	900



L Long Haul



L Long Haul



NEW

- Applicable for steer and free-rolling wheel position
- Five ribs with four straight grooves for precise handling
- Special designed tire casing for better mileage and more value for customers
- Cross rib sipes provide better wet traction and reduce external noise



AS678

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11R22.5	G/14	144/142M	14.2	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145L	14.2	8.25	1054	279	3150	850	2900	850
11R24.5	G/14	146/143L	14.2	8.25	1104	279	3000	720	2725	720
11R24.5	H/16	149/146L	14.2	8.25	1104	279	3250	830	3000	830
285/75R24.5	G/14	144/141L	14.2	8.25	1050	283	2800	760	2575	760
285/75R24.5	H/16	147/144L	14.2	8.25	1050	283	3075	830	2800	830
295/75R22.5	G/14	144/141L	14.2	9.00	1014	298	2800	760	2575	760
295/75R22.5	H/16	146/143L	14.2	9.00	1014	298	3000	830	2725	830



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Decoupling tread design suitable for long-distance travelling
- Applicable for steer and free-rolling wheel position



CR989

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11R22.5	G/14	144/142L	14.2	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	14.2	8.25	1054	279	3150	850	2900	850
11R24.5	G/14	146/143L	15.0	8.25	1104	279	3000	720	2725	720
11R24.5	H/16	149/146L	15.0	8.25	1104	279	3250	830	3000	830
285/75R24.5	G/14	144/141L	15.0	8.25	1050	283	2800	760	2575	760
285/75R24.5	H/16	147/144L	15.0	8.25	1050	283	3075	830	2800	830
295/75R22.5	G/14	144/141L	14.2	9.00	1014	298	2800	760	2575	760
295/75R22.5	H/16	146/143L	14.2	9.00	1014	298	3000	830	2725	830



- Wide base multi-rib trailer tyres with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tyre life



CR931

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
12R22.5	H/16	150/147L	15.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	15.0	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	900	3750	900
385/65R22.5	J/18	158L(160K)	15.5	11.75	1072	389	4250	850	-	-
385/65R22.5	L/20	160K(158L)	15.5	11.75	1072	389	4500	900	-	-
425/65R22.5	L/20	165K	15.0	13.00	1124	430	5150	830	-	-
445/65R22.5	L/20	169K	15.0	13.00	1150	444	5800	900	-	-



- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhanced damage resistance



AD733

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
12R22.5	H/16	150/147L	23.0	9.00	1096	300	3350	830	3075	830
12R22.5	J/18	152/149L	23.0	9.00	1096	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	20.6	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	20.6	9.00	1050	298	3550	900	3250	900



L Long Haul



L Long Haul



NEW

- Ultra deep tread with robust tread blocks features excellent wet traction and longer tyre life
- Drive axle applicable providing lateral stability and multiple retreads
- Latest carcass technology guarantees superior footprint and enhanced damage resistance



AD713/751

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
12R22.5	H/16	150/147L	23.0	9.00	1096	300	3350	830	3075	830
12R22.5	J/18	152/149L	23.0	9.00	1096	300	3550	930	3250	930
315/80R22.5	J/18	154/151M(156/150L)	22.5	9.00	1082	312	3750	830	3450	830



NEW

- Applicable for drive wheel position on long-distance and regional transportation
- Solid close shoulder design with special tread compound for enhanced traction
- Computer designed carcass reduces pressure on road and promotes even wear
- Improved casing structure provides remarkable footprint which guarantees longer tread life



AD757

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145/L	20.6	8.25	1065	279	3150	850	2900	850
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	720	2725	720
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	830	3000	830
285/75R24.5	G/14	144/141L	20.6	8.25	1056	283	2800	760	2575	760
285/75R24.5	H/16	147/144L	20.6	8.25	1056	283	3075	830	2800	830
295/75R22.5	G/14	144/141L	20.6	9.00	1020	298	2800	760	2575	760
295/75R22.5	H/16	146/143L	20.6	9.00	1020	298	3000	830	2725	830



- Strong center tread blocks provide excellent all-weather traction
- Special designed tread grooves reduce stone retention for extended tyre life
- Advanced tread compound provides remarkable performance for long haul service



AD710/A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11.00R20	J/18	152/149K	19.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	830	3450	830
12R22.5(AD710A)	H/16	150/147L	20.0	9.00	1085	300	3350	830	3075	830
12R22.5(AD710A)	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930
315/80R22.5(AD710A)	H/16	151/148M	20.6	9.00	1082	312	3450	760	3150	760
315/80R22.5(AD710A)	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830
315/80R22.5(AD710A)	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900



- Designed to provide exceptional Performance and Life in Linehaul Drive applications
- Large block design helps enhance handling and traction on all season highway conditions
- Tread bars maintain an even footprint and help prevent tyre squirm
- Cool running compound to promote longer life, Great CPK performer



CM335/A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11.00R20	J/18	152/149K	20.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145M	20.6	8.25	1065	279	3150	850	2900	850
12R22.5(CM335A)	H/16	150/147L	20.0	9.00	1096	300	3350	830	3075	830
12R22.5(CM335A)	J/18	152/149L	20.0	9.00	1096	300	3550	930	3250	930
315/80R22.5	H/16	151/148M	20.6	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900
315/70R22.5	J/18	152/148M	18.0	9.00	1020	312	3550	850	3150	850
315/70R22.5	L/20	154/150L	18.0	9.00	1020	312	3750	900	3350	900
295/60R22.5	H/16	144/141M	19.0	9.00	926	292	2800	830	2575	830
295/60R22.5	J/18	150/147K	19.0	9.00	926	292	3350	900	3075	900
315/60R22.5	J/18	152/148M	18.0	9.75	950	313	3550	900	3150	900
495/45R22.5	L/20	169K	19.0	17.00	1018	500	5800	900	-	-



L Long Haul



L Long Haul



- Wide and deep tread helps to promote even wear and long tread life resulting in low cost per mile
- Solid close shoulder ribs help to improve even wear
- Three deep grooves evacuate water efficiently for traction
- Strong casing resists cuts and punctures for enhanced toughness and long casing life



CM983

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
10.00R20	H/16	146/143K	18.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	18.0	7.5	1054	278	3250	930	3000	930
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	850	2900	850
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	720	2725	720
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	830	3000	830
285/75R24.5	G/14	144/141L	20.6	8.25	1056	283	2800	760	2575	760
285/75R24.5	H/16	147/144L	20.6	8.25	1056	283	3075	830	2800	830
295/75R22.5	G/14	144/141L	20.6	9.00	1020	298	2800	760	2575	760
295/75R22.5	H/16	146/143M	20.6	9.00	1020	298	3000	830	2725	830

NEW

- Value tire suitable for drive axle
- Special tread compound and tire casing offers good tire mileage for price sensitive customers
- Computer designed tread guarantees good traction for highway service in all season conditions



AD153

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
12R22.5	H/16	150/147L	20.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	19.0	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	19.0	9.00	1050	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	20.0	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/153L)	20.0	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	20.0	9.00	1082	312	4125	900	3750	900

NEW

- Premium wide base drive tire suitable for long haul application.
- Robust tread blocks offer outstanding traction on both wet and dry road condition.
- Enhanced tire carcass guarantees lateral stability, longer mileage and easy retreadability



AD781

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
445/50R22.5	L/20	161L	21.2	14.00	1018	445	4625	830	-	-

NEW

- Wide base super single tire applicable for both steer and trailer service
- Computer designed tread structure provide even wear with less pressure on the road
- Long life tread compound with less heating enhance the original tread life
- Strong steel belt improves the casing durability and promote multiple retreads



AT566

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
445/50R22.5	L/20	161L	13.1	14.00	1018	445	4625	830	-	-

NEW

- Wide base trailer tire specially designed for trailer service
- Special compound and strong tire casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



AT555

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
385/55R19.5	H/16	156J	15.0	12.25	919	386	4000	900	-	-
435/50R19.5	L/20	160J(156K)	13.5	14.00	931	438	4500	900	-	-



L Long Haul



L Long Haul



NEW

- Wide base trailer tire specially designed for trailer service
- Special compound and strong tire casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



AT556

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
445/45R19.5	J/18	156K	14.3	15.00	895	446	4000	900	-	-
445/45R19.5	L/20	160J(156K)	14.3	15.00	895	446	4500	900	-	-



- Wide base with high saturation for maximum mileage efficiency
- Optimised bead construction for better durability
- Scuff resistance ribs protect sidewall from curbing and cutting



AT559

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	930	3250	930
12R22.5	H/16	150/147L	16.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	16.5	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	15.5	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	15.5	9.00	1044	298	3550	900	3250	900
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830
385/65R22.5	J/18	158L(160K)	15.5	11.75	1072	389	4250	850	-	-
385/65R22.5	L/20	160K(158L)	15.5	11.75	1072	389	4500	900	-	-
425/65R22.5	L/20	165K	15.5	13.00	1124	430	5150	830	-	-
445/65R22.5	L/20	169K	15.5	13.00	1150	444	5800	900	-	-
415/45R22.5	L/20	156K	15.5	14.00	946	416	4000	800	-	-



- Cool-running compound construction reduces the energy generated within the tread for low rolling resistance
- Shallow tread depth promotes low rolling resistance for fuel economy and long even wear
- Four wide grooves provide all-season performance on wet and dry roads



CR915

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11R22.5	G/14	144/142M	11.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	11.0	8.25	1054	279	3150	850	2900	850
295/75R22.5	G/14	144/141M	11.0	9.00	1014	298	2800	760	2575	760
295/75R22.5	H/16	146/143M	11.0	9.00	1014	298	3000	830	2725	830



NEW

- Super value tire applicable for trailer axle
- Improved tread compound and tire casing provide superb balance between cost and performance



AT161

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11R22.5	G/14	144/142M	15.5	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	15.5	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	15.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	15.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	15.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	15.5	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/153L)	15.5	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	15.5	9.00	1076	312	4125	900	3750	900



 R Regional

- Shorter jourey with frequent braking,accelerating and turing
- Improved road grip with maximum mileage
- Exceptional tough type



 R Regional



- Premium five-rib design for regional all position application
- SILICA compound ensures better tyre life with reduced rolling resistance
- Computer aided carcass design helps improve footprint for better mileage performance



ES660

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
11.00R20	J/18	152/149K	15.5	8.0	1085	293	3550	930	3250	930
11R22.5	G/14	144/142M	15.5	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145L	15.5	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	15.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	16.5	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	16.5	9.00	1044	298	3550	900	3250	900
315/80R22.5	J/18	154/151M(156/150L)	15.5	9.00	1076	312	3750	830	3450	830



- Tread pattern provides extended even wear and offers excellent wet traction
- Advanced compound promotes mileage before removal for long tyre life



CR950

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	(KPA)	Dual (KG)	(KPA)
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	770	1320	770
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	770	1600	770
7.50R20	G/14	130/128L	13.0	6.0	935	215	1900	830	1800	830
8.25R20	G/14	136/134K	14.0	6.5	974	236	2240	830	2120	830
8.25R20	H/16	139/137K	14.0	6.5	974	236	2430	930	2300	930
8R22.5	F/12	128/127M	13.5	6.00	935	203	1800	760	1750	760
8R22.5	G/14	130/128M	13.5	6.00	935	203	1900	830	1800	830
8.5R17.5	F/12	121/120L	12.0	6.00	802	215	1450	625	1400	625
9R22.5	F/12	133/131M	14.0	6.75	974	229	2060	720	1950	720
9R22.5	G/14	136/134M	14.0	6.75	974	229	2240	830	2120	830
9.5R17.5	G/14	129/127L	13.0	6.75	842	240	1850	750	1750	750
9.5R17.5	H/16	143/141J	13.0	6.75	842	240	2725	875	2575	875
10R22.5	G/14	141/139M	15.0	7.50	1019	254	2575	790	2430	790
10R22.5	H/16	144/142M	15.0	7.50	1019	254	2800	900	2650	900
215/75R17.5	G/14	126/124M	13.0	6.00	767	211	1700	760	1600	760
215/75R17.5	H/16	135/133J	13.0	6.00	767	211	2180	850	2060	850



R

Regional



R

Regional



- Multiple gripping edges slice through water and road films for a solid grip
- Four wide continuous rib design help resist tread squirm and heel-and-tow wear for exceptionally long tread life
- Three circumferential grooves help deliver all-season traction on wet or dry road
- Closed shoulder design helps promote even wear throughout the tyre life



CM958

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.50R15	H/16	135/133J	13.0	6.0	780	212	2180	850	2060	850
8.25R15	J/18	143/141J	14.0	6.50	836	234	2725	850	2575	850
7.00R16	G/14	118/114L	14.0	5.50F	785	200	1320	770	1180	770
7.50R16	G/14	122/118L	15.5	6.00G	815	215	1500	770	1320	770
8.25R16	H/16	128/124L	16.0	6.50H	865	235	1800	770	1600	770
8.25R20	H/16	139/137K	14.0	6.5	974	236	2430	930	2300	930
9.00R20	H/16	144/142K	16.0	7.0	1019	259	2800	900	2650	900
9.00R20	H/16+	144/142J	16.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	15.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	15.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	16.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	17.0	8.5	1125	315	3750	830	3450	830
8R22.5	F/12	128/127M	13.5	6.00	935	203	1800	760	1750	760
8R22.5	G/14	130/128M	13.5	6.00	935	203	1900	830	1800	830
9R22.5	F/12	133/131M	14.0	6.75	974	229	2060	720	1950	720
9R22.5	G/14	136/134M	14.0	6.75	974	229	2240	830	2120	830
10R22.5	G/14	141/139M	15.0	7.50	1019	254	2575	790	2430	790
10R22.5	H/16	144/142M	15.0	7.50	1019	254	2800	900	2650	900
11R22.5	G/14	144/142M	17.5	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145L	17.5	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	18.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	18.0	9.00	1085	300	3550	930	3250	930
13R22.5	J/18	156/150K	20.0	9.75	1124	320	4000	875	3350	875
13R22.5	J/18	156/151K	20.0	9.75	1124	320	4000	875	3450	875
13R22.5	J/18+	154/151K	20.0	9.75	1124	320	3750	830	3450	830
295/80R22.5	H/16	150/147M	18.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	18.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	18.0	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	18.0	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	18.0	9.00	1082	312	4125	900	3750	900
215/75R17.5	G/14	126/124M	13.0	6.00	767	211	1700	760	1600	760
215/75R17.5	H/16	135/133J	13.0	6.00	767	211	2180	850	2060	850
255/70R22.5	H/16	140/137L	15.0	7.50	930	255	2500	830	2300	830



- Improved close shoulder helps to improve even wear resulting in long tread life
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads



CR960A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	770	1320	770
8.25R16	G/14	128/126L	13.0	6.50H	855	235	1800	670	1700	670
8.25R16	H/16	128/124L	13.0	6.50H	855	235	1800	770	1600	770
8R19.5	F/12	124/122L	13.0	6.00	859	203	1600	760	1500	760
11R22.5	G/14	144/142L	14.2	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	14.2	8.25	1054	279	3150	850	2900	850
11R24.5	G/14	146/143L	14.2	8.25	1104	279	3000	720	2725	720
11R24.5	H/16	149/146L	14.2	8.25	1104	279	3250	830	3000	830
12R22.5	H/16	150/147L	15.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	15.5	9.00	1085	300	3550	930	3250	930
ST235/85R16	G/14	129/125L	10.5	6 1/2J	806	235	1850	760	1650	760
315/80R22.5	H/16	151/148M	15.0	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	15.0	9.00	1076	312	4125	900	3750	900
205/75R17.5	F/12	122/120M	12.0	6.00	753	205	1500	675	1400	675
205/75R17.5	G/14	124/122M	12.0	6.00	753	205	1600	750	1500	750
215/75R17.5	G/14	126/124M	12.5	6.00	767	211	1700	760	1600	760
215/75R17.5	H/16	135/133J	12.5	6.00	767	211	2180	850	2060	850
225/75R17.5	F/12	126/125M	12.5	6.75	783	226	1700	675	1650	675
225/75R17.5	G/14	129/127M	12.5	6.75	783	226	1850	725	1750	725
235/75R17.5	F/12	130/128M	13.3	6.75	797	233	1900	725	1800	725
235/75R17.5	G/14	132/130M	13.3	6.75	797	233	2000	775	1900	775
235/75R17.5	H/16	143/141J	13.3	6.75	797	233	2725	875	2575	875
285/75R24.5	G/14	144/141L	14.2	8.25	1050	283	2800	760	2575	760
295/75R22.5	G/14	144/141L	14.2	9.00	1014	298	2800	760	2575	760
295/75R22.5	H/16	146/143L	14.2	9.00	1014	298	3000	830	2725	830
225/70R19.5	F/12	125/123M	13.0	6.75	811	226	1650	660	1550	660
245/70R17.5	H/16	136/134M	13.0	7.50	789	248	2240	850	2120	850
245/70R17.5	J/18	143/141J	13.0	7.50	789	248	2725	875	2575	875
245/70R19.5	G/14	133/131M	13.0	7.50	839	248	2060	760	1950	760
245/70R19.5	H/16	136/134M	13.0	7.50	839	248	2240	830	2120	830
285/70R19.5	G/14	140/137M	14.5	8.25	895	283	2500	725	2300	725
285/70R19.5	H/16	146/144K	14.5	8.25	895	283	3000	850	2800	850
315/70R22.5	J/18	152/148M	15.0	9.00	1014	312	3550	850	3150	850
315/70R22.5	L/20	154/150L	15.0	9.00	1014	312	3750	900	3350	900



R

Regional



R

Regional



- All wheel position applicable for long or medium distance travel
- Special tread compounding ensuring longer wear life and service life
- Improved cut resistance helping to provide better tire performance



MD752

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
12.00R24	J/18	158/155K	16.0	8.5	1226	315	4250	830	3875	830
12.00R24	L/20	160/157K	16.0	8.5	1226	315	4500	900	4125	900
315/80R22.5	J/18	154/151M(156/150L)	18.0	9.00	1082	312	3750	830	3450	830



- Four ribs ensure even wear and comfortable riding
- Siped zig-zag rib helps improve traction on wet and muddy surface
- Deep circumferential grooves improves efficient water evacuation, lateral stability, and long tyre life



CM912

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
12.00R24	J/18	158/155K	19.0	8.5	1226	315	4250	830	3875	830
12.00R24	L/20	160/157K	19.0	8.5	1226	315	4500	900	4125	900



CR907

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
7.00R15	F/12	113/109L	11.0	5.50F	750	200	1150	670	1030	670
6.50R16	F/12	110/105L	9.5	5.50F	750	185	1060	670	925	670
7.00R16	G/14	118/114L	11.0	5.50F	775	200	1320	770	1180	770
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	770	1320	770



NEW

- Designed for both steer and trailer axle
- Four ribs design provides excellent footprint and more contact on the road surface
- Special tire casing and compound offer great value by longer mileage with less cost



AZ171

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
12R22.5	H/16	150/147L	16.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	16.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	16.0	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/153L)	16.0	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	16.0	9.00	1076	312	4125	900	3750	900



- This tyre delivers outstanding traction, long even wear and advanced casing design to ensure durability
- An extra wide, self cleaning and full depth tread design provides improved water evacuation, lateral stability
- A strong shoulder block ensures a flat even wear on all types of application with shallow lug grooves on shoulder to minimize shoulder heel and toe
- Stone ejection groove design provides a more durable casing life for retreadability by minimizing damage to the casing



CM333

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
11.00R20	J/18	152/149K	20.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142L	19.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	19.6	8.25	1065	279	3150	850	2900	850
12R22.5	H/16	150/147L	20.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930
315/80R22.5	H/16	151/148M	20.6	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900



R

Regional



R

Regional



- Tie-barred shoulders enhance handling and help deliver even wear
- Wide tread and special block design ensure outstanding long tyre life and even wear
- Stone ejector platform helps to prevent stones from lodging in grooves and drilling into



CM961/A

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11.00R20	J/18	152/149K	20.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	21.0	8.5	1125	315	3750	830	3450	830
12R22.5	H/16	150/147L	20.0	9.00	1085	300	3350	830	3075	830
12R22.5(CM961A)	H/16	150/147L	22.0	9.00	1096	300	3350	830	3075	830
12R22.5	J/18	152/149L	20.0	9.00	1085	300	3550	930	3250	930
12R22.5(CM961A)	J/18	152/149L	22.0	9.00	1096	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	20.6	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	20.6	9.00	1050	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	20.6	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900



- Non-directional tread design for easy operating
- Open lug design helps provide traction in wet or snowy conditions



CM987/E

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	770	1600	770
9.00R16	G/14	131/126L	15.0	6.50H	900	255	1950	670	1700	670
8.25R20(CM987E)	H/16	139/137K	19.0	6.5	974	236	2430	930	2300	930
9.00R20	G/14	141/139K	16.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	16.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	17.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	17.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	18.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	18.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	19.0	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	850	2900	850



- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Aggressive traction blocks helps to increase wet traction
- Strong open shoulder produces powerful traction
- Suitable for single axle vehicles



CM980

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	850	2900	850
11R24.5	G/14	146/143L	20.6	8.25	1116	279	3000	720	2725	720
11R24.5	H/16	149/146L	20.6	8.25	1116	279	3250	830	3000	830
285/75R24.5	G/14	144/141L	20.6	8.25	1056	283	2800	760	2575	760
285/75R24.5	H/16	147/144L	20.6	8.25	1056	283	3075	830	2800	830
295/75R22.5	G/14	144/141L	20.6	9.00	1020	298	2800	760	2575	760
295/75R22.5	H/16	146/143M	20.6	9.00	1020	298	3000	830	2725	830

- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Open shoulder blocks improve traction on dry and wet road surface
- High blade density of tread design helps to provide even wearing
- Suitable for single axle vehicles



CM985

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
10.00R20	H/16	146/143K	19.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	19.0	7.5	1054	278	3250	930	3000	930
11R22.5	G/14	144/142L	19.0	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	19.0	8.25	1065	279	3150	850	2900	850
12R22.5	H/16	150/147L	22.0	9.00	1096	300	3350	830	3075	830
12R22.5	J/18	152/149L	22.0	9.00	1096	300	3550	930	3250	930
315/80R22.5	H/16	151/148M	22.0	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	22.0	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	22.0	9.00	1082	312	4125	900	3750	900
315/70R22.5	J/18	152/148M	20.5	9.00	1020	312	3550	850	3150	850
315/70R22.5	L/20	154/150L	20.5	9.00	1020	312	3750	900	3350	900



R

Regional



R

Regional



- Traction block tread design for high drive wheel efficiency in all seasons
- Aggressive blading helps provide road-gripping traction
- Open shoulder produces powerful traction on wet and dry roads



CM986

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
205/75R17.5	F/12	122/120M	14.0	6.00	753	205	1500	675	1400	675
205/75R17.5	G/14	124/122M	14.0	6.00	753	205	1600	750	1500	750
215/75R17.5	G/14	126/124M	14.5	6.00	767	211	1700	760	1600	760
215/75R17.5	H/16	135/133J	14.5	6.00	767	211	2180	850	2060	850
225/75R17.5	F/12	126/125M	14.5	6.75	783	226	1700	675	1650	675
225/75R17.5	G/14	129/127M	14.5	6.75	783	226	1850	725	1750	725
235/75R17.5	F/12	130/128M	15.4	6.75	797	233	1900	725	1800	725
235/75R17.5	H/16	143/141J	15.4	6.75	797	233	2725	875	2575	875
235/75R17.5	H/16	132/130M	15.4	6.75	797	233	2000	830	1900	830
225/70R19.5	F/12	125/123M	15.0	6.75	811	226	1650	660	1550	660
245/70R17.5	H/16	136/134M	15.0	7.50	789	248	2240	850	2120	850
245/70R17.5	J/18	143/141J	15.0	7.50	789	248	2725	875	2575	875
245/70R19.5	G/14	133/131M	15.4	7.50	839	248	2060	760	1950	760
245/70R19.5	H/16	136/134M	15.4	7.50	839	248	2240	830	2120	830
285/70R19.5	G/14	140/137M	16.0	8.25	895	283	2500	725	2300	725
285/70R19.5	H/16	146/144K	16.0	8.25	895	283	3000	850	2800	850



NEW

- Value tire suitable for drive axle
- Aggressive tread blocks with special tread compound provide good traction on paved roads for price-oriented customers
- Special tread design promises remarkable footprint and even wear to extend tread life



AD156

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
12R22.5	H/16	150/147L	19.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	19.0	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	19.0	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	19.0	9.00	1050	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	19.0	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	156/153L(154/151M)	19.0	9.00	1082	312	4000	850	3650	850
315/80R22.5	L/20	157/154K	19.0	9.00	1082	312	4125	900	3750	900
315/70R22.5	J/18	152/148M(154/150L)	18.0	9.00	1020	312	3550	850	3150	850
315/70R22.5	L/20	154/150L(152/148M)	18.0	9.00	1020	312	3750	900	3350	900



- Wide tread designed for improved mileage
- Large block design helps enhance handling and traction on all -season highway conditions
- Special rubber compound provides high mileage and long tread life



CM993

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
9.00R20	G/14	141/139K	17.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	17.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	18.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	18.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	19.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	19.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	20.0	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142M	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	850	2900	850
12R22.5	H/16	150/147L	20.6	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	20.6	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	20.6	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149M	20.6	9.00	1050	298	3550	900	3250	900
315/80R22.5	H/16	151/148M	20.6	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	20.6	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	20.6	9.00	1082	312	4125	900	3750	900



- Special drive pattern with open shoulder provides good traction in wet and dry roads
- Durable tyre casing enhances tyre life



CM954

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
10.00R20	H/16	146/143K	16.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	16.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	15.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	15.0	8.0	1085	293	3550	930	3250	930
11.00R20	L/20	154/151J	15.0	8.0	1085	293	3750	970	3450	970
11R22.5	G/14	144/142L	16.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	16.0	8.25	1054	279	3150	850	2900	850



R

Regional



R

Regional



- Special designed tread with SILICA compound features longer tyre life with low rolling resistance
- Enhanced shoulder design helps to reduce sidewall curbing and cutting
- Stone ejection system eliminate stone retention for extended tyre mileage



ET550

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
11.00R20	H/16	150/147K	15.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	15.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	16.5	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142M	15.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	15.0	8.25	1054	279	3150	850	2900	850
12R22.5	H/16	150/147L	14.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	14.5	9.00	1085	300	3550	930	3250	930
13R22.5	J/18	156/151K	16.0	9.75	1124	320	4000	875	3450	875
315/80R22.5	J/18	154/151M(156/150L)	15.0	9.00	1076	312	3750	830	3450	830



- Strong tire carcass offers lateral durability for regional application
- Good damage protection and even wear profile feature outstanding performance in all conditions
- Excellent traction and good handling



AT560

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
385/65R22.5	J/18	158L(160K)	16.0	11.75	1072	389	4250	850	-	-
385/65R22.5	L/20	160K(158L)	16.0	11.75	1072	389	4500	900	-	-



- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



AZ676

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
6.50R16	F/12	110/105L	9.5	5.50F	750	185	1060	670	925	670
7.00R16	G/14	118/114L	11.0	5.50F	775	200	1320	770	1180	770
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	770	1320	770
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	770	1600	770
8.25R20	H/16	139/137K	15.0	6.5	974	236	2430	930	2300	930
9.00R20	H/16	144/142K	15.5	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	16.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	16.0	7.5	1054	278	3250	930	3000	930
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	17.5	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142M	16.8	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145M	16.8	8.25	1065	279	3150	850	2900	850
12R22.5	H/16	150/147L	16.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147M	16.0	9.00	1044	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	16.0	9.00	1044	298	3550	900	3250	900
315/80R22.5	J/18	154/151M(156/150L)	16.0	9.00	1076	312	3750	830	3450	830



M

Mixed Service

- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition




M

Mixed Service
On & Off



- Aggressive multi-service, all position tread pattern promises excellent traction in ON/OFF road service
- Outstanding self-cleaning tread design ensures long-life service in ON/OFF road conditions
- Robust tread blocks and rugged casing allows for heavy loads and resist casing penetration and damage

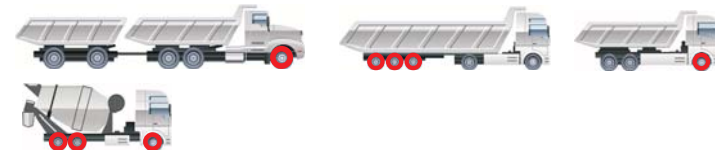

AT557

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
12R22.5	H/16	150/147L	17.5	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	17.5	9.00	1085	300	3550	930	3250	930
315/80R22.5	H/16	151/148M	17.5	9.00	1076	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/153L)	17.5	9.00	1076	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	17.5	9.00	1076	312	4125	900	3750	900
385/65R22.5	J/18	158L(160K)	18.0	11.75	1072	389	4250	850	-	-
385/65R22.5	L/20	160K(158L)	18.0	11.75	1072	389	4500	900	-	-
425/65R22.5	L/20	165K	18.0	13.00	1124	430	5150	830	-	-
445/65R22.5	L/20	169K	18.0	13.00	1150	444	5800	900	-	-



- Excellent traction for ON/OFF drive axle application
- Aggressive and optimum self-cleaning tread with lateral grooves provides remarkable performance in all weather conditions both one and off the roads



MD738

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
9.5R17.5	G/14	129/127L	16.5	6.75	842	240	1850	750	1750	750
9.5R17.5	H/16	143/141J	16.5	6.75	842	240	2725	875	2575	875
11R22.5	G/14	144/142L	20.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	20.6	8.25	1065	279	3150	850	2900	850
11R24.5	G/14	146/143L	22.6	8.25	1116	279	3000	720	2725	720
11R24.5	H/16	149/146L	22.6	8.25	1116	279	3250	830	3000	830
12R22.5	H/16	150/147L	20.6	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	20.6	9.00	1085	300	3550	930	3250	930
295/80R22.5	H/16	150/147L	20.6	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	20.6	9.00	1050	298	3550	900	3250	900
275/70R22.5	H/16	148/145J	18.0	8.25	964	276	3150	900	2900	900
275/70R22.5	J/18	152/148J	18.0	8.25	964	276	3550	930	3150	930

**M****Mixed Service**
On & Off**M****Mixed Service**
On & Off

- Premium tyre designed for drive position applicable for rough road surface
- Aggressive direction tread with robust tread blocks providing extra traction for on/off road condition
- Special rubber compound ensuring more resistance to cuts and tearing

**MD777**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
315/80R22.5	J/18	154/151L(156/150K)	23.0	9.00	1082	312	3750	830	3450	830



- Drive axle tyre applicable for mud and sand terrain with short on high-way use
- Wide tread and open shoulder blocks help enhance traction and braking on rough roads with mud or gravel
- Special tread compounds resist chipping, chunking and tearing

**CM913/A**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
8.25R20	H/16	139/137K	16.5	6.5	974	236	2430	930	2300	930
9.00R20	H/16	144/142K	20.0	7.0	1019	259	2800	900	2650	900
9.00R20	H/16+	144/142J	20.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	20.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	20.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	20.6	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149J	20.6	8.0	1085	293	3550	930	3250	930
11.00R20(CM913A)	J/18	152/149K	18.6	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	22.0	8.5	1125	315	3750	830	3450	830
12.00R20(CM913A)	J/18	154/151K	19.0	8.5	1125	315	3750	830	3450	830
12.00R20	L/20	156/153J	22.0	8.5	1125	315	4000	900	3650	900
12.00R20(CM913A)	L/20	156/153J	19.0	8.5	1125	315	4000	900	3650	900
12.00R24(CM913A)	J/18	158/155K	19.0	8.5	1226	315	4250	830	3875	830
12.00R24(CM913A)	L/20	160/157K	19.0	8.5	1226	315	4500	900	4125	900
12R22.5(CM913A)	H/16	150/147L	20.6	9.00	1085	300	3350	830	3075	830
12R22.5(CM913A)	J/18	152/149L	20.6	9.00	1085	300	3550	930	3250	930
315/80R22.5(CM913A)	H/16	151/148M	19.0	9.00	1082	312	3450	760	3150	760
315/80R22.5(CM913A)	J/18	154/151M(156/150L)	19.0	9.00	1082	312	3750	830	3450	830
315/80R22.5(CM913A)	L/20	157/154K	19.0	9.00	1082	312	4125	900	3750	900



- Drive axle tyre applicable for rough road service
- Durable tyre casing and wide tread enhance tyre life
- Open lug design helps deliver super traction in wet and off-road conditions

**CM923**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
13R22.5	J/18	156/150K	20.0	9.75	1124	320	4000	875	3350	875
13R22.5	J/18	156/151K	20.0	9.75	1124	320	4000	875	3450	875
13R22.5	J/18	154/151K	20.0	9.75	1124	320	3750	830	3450	830
13R22.5	H/16	152/149L	20.0	9.75	1124	320	3550	760	3250	760
315/80R22.5	H/16	151/148M	20.0	9.00	1082	312	3450	760	3150	760
315/80R22.5	J/18	154/151M(156/150L)	20.0	9.00	1082	312	3750	830	3450	830
315/80R22.5	L/20	157/154K	20.0	9.00	1082	312	4125	900	3750	900



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads

**CM973**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
10.00R20	J/18	149/146J	17.5	7.5	1054	278	3250	930	3000	930
11R24.5	G/14	146/143L	15.0	8.25	1104	279	3000	720	2725	720
11R24.5	H/16	149/146L	15.0	8.25	1104	279	3250	830	3000	830

**M****Mixed Service**
On & Off**M****Mixed Service**
On & Off

- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads



CM988

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.00R16	G/14	118/114L	14.0	5.50F	785	200	1320	770	1180	770
7.50R16	G/14	122/118L	15.5	6.00G	805	215	1500	770	1320	770
8.25R16	H/16	128/124L	16.0	6.50H	865	235	1800	770	1600	770
8.25R20	H/16	139/137K	15.5	6.5	974	236	2430	930	2300	930
9.00R20	H/16	144/142K	16.0	7.0	1019	259	2800	900	2650	900
9.00R20	H/16+	144/142J	16.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	15.5	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	15.5	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	16.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	17.0	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142L	18.5	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145L	18.5	8.25	1065	279	3150	850	2900	850
12R22.5	H/16	150/147L	18.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	18.0	9.00	1085	300	3550	930	3250	930



- Rugged tread blocks and tread design offer excellent performance on mining, logging and construction sites
- Tough, high-tear compound in tread helps resist chipping and chunk



CM997

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
11.00R20	H/16	150/147K	20.6	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149J	20.6	8.0	1085	293	3550	930	3250	930
295/80R22.5	H/16	150/147K	20.6	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149J	20.6	9.00	1050	298	3550	900	3250	900



- Rugged tread blocks and tread design offer outstanding off-road traction
- Tough tread rubber compounds help resist chipping and chunking
- Enhanced traction in mud and sand



CB999

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.50R16	G/14	122/118M	15.0	6.00G	815	215	1500	770	1320	770
7.50R16	D/8	112/110N	15.0	6.00G	815	215	1120	460	1060	460
7.50R16	E/10	116/114N	15.0	6.00G	815	215	1250	560	1180	560
14.00R20	J/18	161/158K	19.5	10.00	1240	375	4625	690	4250	690
14.00R20	L/20	164/161J	19.5	10.00	1240	375	5000	790	4625	790



- Continuous central design ensures driving stability and smooth ride
- The central siped zig-zag rib ensures even wear and grip on wet and muddy surface
- Enhanced durability over rough road with good on-road performance



CB981

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.50R16	G/14	122/118L	16.0	6.00G	815	215	1500	770	1320	770
8.25R16	G/14	128/126L	16.5	6.50H	865	235	1800	670	1700	670
8.25R16	H/16	128/124L	16.5	6.50H	865	235	1800	770	1600	770
8.25R20	G/14	136/134K	17.0	6.5	974	236	2240	830	2120	830
8.25R20	H/16	139/137K	17.0	6.5	974	236	2430	930	2300	930
9.00R20	G/14	141/139K	18.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	18.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	19.5	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	19.5	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	20.5	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149J	20.5	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	20.5	8.5	1125	315	3750	830	3450	830
11R22.5	G/14	144/142L	19.6	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145L	19.6	8.25	1065	279	3150	850	2900	850

**M****Mixed Service**
On & Off**M****Mixed Service**
On & Off

- Aggressive block design provides outstanding traction on rough roads
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Durable tyre casing for heavy loads
- Applicable for low speed use. Maximum speed shall be limited to 70 km/h in winter and 50 km/h in summer

**CM998**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
7.00R16	G/14	118/114L	15.5	5.50F	785	200	1320	770	1180	770
7.50R16	G/14	122/118L	16.0	6.00G	815	215	1500	770	1320	770
8.25R16	G/14	128/126L	16.5	6.50H	865	235	1800	670	1700	670
8.25R16	H/16	128/124L	16.5	6.50H	865	235	1800	770	1600	770
8.25R20	H/16	139/137K	16.5	6.5	974	236	2430	930	2300	930
9.00R20	G/14	141/139K	17.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	17.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	18.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	18.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	19.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149J	19.0	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	20.0	8.5	1125	315	3750	830	3450	830
12.00R20	L/20	156/153J	20.5	8.5	1125	315	4000	900	3650	900

- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing

**CR926/B/D/E**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single		Dual	
							(KG)	(KPA)	(KG)	(KPA)
6.50R16	F/12	110/105L	9.5	5.50F	750	185	1060	670	925	670
7.00R16	G/14	118/114M	11.0	5.50F	775	200	1320	770	1180	770
7.50R16	G/14	122/118L	12.0	6.00G	805	215	1500	770	1320	770
8.25R16	G/14	128/126L	14.0	6.50H	855	235	1800	670	1700	670
8.25R16	H/16	128/124L	14.0	6.50H	855	235	1800	770	1600	770
7.50R20	G/14	130/128L	14.0	6.0	935	215	1900	830	1800	830
8.25R20	G/14	136/134K	15.0	6.5	974	236	2240	830	2120	830
8.25R20	H/16	139/137K	15.0	6.5	974	236	2430	930	2300	930
9.00R20	G/14	141/139K	15.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	15.0	7.0	1019	259	2800	900	2650	900
10.00R20(CR926/B/D)	H/16	146/143K	16.0	7.5	1054	278	3000	830	2725	830
10.00R20(CR926/B/D)	J/18	149/146J	16.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	16.0	8.0	1085	293	3350	830	3075	830
11.00R20(CR926B)	H/16	150/147K	17.0	8.0	1085	293	3350	830	3075	830
11.00R20(CR926E)	H/16	150/147K	19.5	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149K	16.0	8.0	1085	293	3550	930	3250	930
11.00R20(CR926B)	J/18	152/149K	17.0	8.0	1085	293	3550	930	3250	930
11.00R20(CR926E)	J/18	152/149K	19.5	8.0	1085	293	3550	930	3250	930
11.00R20	L/20	154/151J	16.0	8.0	1085	293	3750	970	3450	970
12.00R20	J/18	154/151K	17.5	8.5	1125	315	3750	830	3450	830
12.00R20(CR926E)	J/18	154/151J	20.5	8.5	1125	315	3750	830	3450	830
12.00R20	L/20	156/153J	17.5	8.5	1125	315	4000	900	3650	900
12.00R20	M/22	158/155F	17.5	8.5	1125	315	4250	970	3875	970
12.00R24(CR926B)	J/18	158/155K	19.0	8.5	1226	315	4250	830	3875	830
12.00R24	J/18	158/155K	16.0	8.5	1226	315	4250	830	3875	830
12.00R24(CR926B)	L/20	160/157K	19.0	8.5	1226	315	4500	900	4125	900
12.00R24	L/20	160/157K	16.0	8.5	1226	315	4500	900	4125	900
11R22.5(CR926D)	G/14	144/142M	16.8	8.25	1054	279	2800	720	2650	720
11R22.5(CR926D)	H/16	148/145M	16.8	8.25	1054	279	3150	850	2900	850
11R24.5(CR926D)	G/14	146/143L	16.8	8.25	1104	279	3000	720	2725	720
11R24.5(CR926D)	H/16	149/146L	16.8	8.25	1104	279	3250	830	3000	830
12R22.5	H/16	150/147L	16.0	9.00	1085	300	3350	830	3075	830
12R22.5	J/18	152/149L	16.0	9.00	1085	300	3550	930	3250	930
13R22.5	J/18	156/151K	16.0	9.75	1124	320	4000	875	3450	875
295/80R22.5(CR926D)	H/16	150/147L	16.0	9.00	1044	298	3350	830	3075	830
295/80R22.5(CR926D)	J/18	152/149L	16.0	9.00	1044	298	3550	900	3250	900
315/80R22.5(CR926B)	H/16	151/148M	16.5	9.00	1076	312	3450	760	3150	760
315/80R22.5(CR926B)	J/18	154/151M(156/150L)	16.5	9.00	1076	312	3750	830	3450	830
315/80R22.5(CR926B)	L/20	157/154K	16.5	9.00	1076	312	4125	900	3750	900

**M****Mixed Service
Mining****M****Mixed Service
Mining****NEW**

- Applicable for drive axle on unpaved road
- Robust tread block provide outstanding traction on sand and mud road surface
- Special groove design with stone ejector prevent from stone penetration
- Durable tire carcass and improved tread compound help to resist chipping and chunking for longer tire life

**EZ356**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
8.25R16	H/16	128/124J	16.0	6.50H	865	235	1800	770	1600	770
12.00R20	J/18	154/151F	24.0	8.5	1136	315	3750	830	3450	830
12.00R20	L/20	156/153C	24.0	8.5	1136	315	4000	900	3650	900



- Special tread compounds resist chipping and chunking in rugged off-road conditions
- Robust tread block help promote traction and floatation capacity on rough roads
- Applicable for low speed mining service

**CB332**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.00R16	G/14	118/114J	18.0	5.50F	785	200	1320	770	1180	770
7.50R16	G/14	122/118J	18.0	6.00G	815	215	1500	770	1320	770
8.25R16	H/16	128/124J	16.5	6.50H	865	235	1800	770	1600	770
8.25R20	H/16	139/137E	19.0	6.5	974	236	2430	930	2300	930
9.00R20	H/16	144/142D	20.5	7.0	1019	259	2800	900	2650	900
9.00R20	H/16+	144/142D	20.5	7.0	1019	259	2800	900	2650	900
10.00R20	J/18	149/146D	23.5	7.5	1065	278	3250	930	3000	930
11.00R20	J/18	152/149D	24.5	8.0	1096	293	3550	930	3250	930
12.00R20	J/18	154/151D	25.5	8.5	1136	315	3750	830	3450	830
12.00R24	J/18	158/155F	25.5	8.5	1226	315	4250	830	3875	830
12.00R24	L/20	160/157C	25.5	8.5	1226	315	4500	900	4125	900



- Aggressive lug design with large blocks at tread center provides excellent traction and braking on rough roads with mud or gravel and is self-cleaning for ease of maintenance
- Applicable in mining, logging, construction or rock and quarry operations with some very short on high-way use possible
- Special tread compounds resist chipping and chunking in rugged off-road conditions

**CB972/E**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
9.00R20	G/14	141/139F	22.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142F	22.0	7.0	1019	259	2800	900	2650	900
9.00R20	H/16+	144/142C	22.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143F	24.0	7.5	1065	278	3000	830	2725	830
10.00R20	J/18	149/146F	24.0	7.5	1065	278	3250	930	3000	930
11.00R20	J/18	152/149F	24.5	8.0	1096	293	3550	930	3250	930
12.00R20	J/18	154/151F	25.5	8.5	1136	315	3750	830	3450	830
12.00R20	M/22	158/155C	25.5	8.5	1136	315	4250	970	3875	970
12.00R24	J/18	158/155F	25.0	8.5	1226	315	4250	830	3875	830
12.00R24(CB972E)	J/18	158/155F	32.0	8.5	1238	315	4250	830	3875	830
12.00R24	L/20	160/157C	25.0	8.5	1226	315	4500	900	4125	900
12.00R24(CB972E)	L/20	160/157C	32.0	8.5	1238	315	4500	900	4125	900
11R22.5	G/14	144/142G	23.0	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145J	23.0	8.25	1065	279	3150	850	2900	850
11R24.5	G/14	146/143F	23.0	8.25	1116	279	3000	720	2725	720
11R24.5	H/16	149/146F	23.0	8.25	1116	279	3250	830	3000	830
12R22.5	H/16	150/147F	24.5	9.00	1096	300	3350	830	3075	830
12R22.5	J/18	152/149F	24.5	9.00	1096	300	3550	930	3250	930



- All-terrain all position tyres designed for special service
- Special tread compounds resist chipping and chunking in rugged off-road conditions
- Open shoulder tread design help promote traction and floatation capacity on rough roads

**CB995/A**

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
7.50R16	G/14	122/118L	16.0	6.00G	815	215	1500	770	1320	770
8.25R16	G/14	128/126L	16.5	6.50H	865	235	1800	670	1700	670
8.25R16	H/16	128/124L	16.5	6.50H	865	235	1800	770	1600	770
8.25R20	G/14	136/134K	16.0	6.5	974	236	2240	830	2120	830
8.25R20	H/16	139/137K	16.0	6.5	974	236	2430	930	2300	930
9.00R20	G/14	141/139K	17.0	7.0	1019	259	2575	790	2430	790
9.00R20	H/16	144/142K	17.0	7.0	1019	259	2800	900	2650	900
10.00R20	H/16	146/143K	18.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	18.0	7.5	1054	278	3250	930	3000	930
11.00R20	H/16	150/147K	19.0	8.0	1085	293	3350	830	3075	830
11.00R20	J/18	152/149J	19.0	8.0	1085	293	3550	930	3250	930
11.00R20(CB995A)	J/18	152/149J	17.5	8.0	1085	293	3550	930	3250	930
12.00R20	J/18	154/151K	20.0	8.5	1125	315	3750	830	3450	830
12.00R20	L/20	156/153J	20.0	8.5	1125	315	4000	900	3650	900



M

Mixed Service
Mining



- Aggressive blocks provides outstanding traction on rough roads
- Suitable for all season and all position application on mud and sand terrain with some short on high-way use
- Cool-running compound enhances toughness casing



CB901

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
11.00R20	J/18	152/149J	21.0	8.00	1085	293	3550	930	3250	930
12.00R20	J/18	154/151F	22.0	8.50	1125	315	3750	830	3450	830



- Aggressive blocks provides outstanding traction on rough roads
- Suitable for all season and all position application on mud and sand terrain with some short on high-way use
- Cool-running compound enhances toughness casing



CB905

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
8.25R16	H/16	128/124J	16.5	6.50H	865	235	1800	770	1600	770
11.00R20	J/18	152/149D	24.5	8.00	1096	293	3550	930	3250	930
12.00R20	J/18	154/151D	24.5	8.50	1136	315	3750	830	3450	830



- Aggressive lug design with large block at tread center designed for mining, rock and quarry operations
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Stone ejector platform prevents trapped stones from punching deeper and piecing belt



CB919

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
11.00R20	J/18	152/149F	25.5	8.0	1096	293	3550	930	3250	930
12.00R20	J/18	154/151F	25.5	8.5	1136	315	3750	830	3450	830
12.00R20	M/22	158/155C	25.5	8.5	1136	315	4250	970	3875	970
11R22.5	G/14	144/142G	23.0	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145J	23.0	8.25	1065	279	3150	850	2900	850
12R22.5	H/16	150/147F	23.5	9.00	1096	300	3350	830	3075	830
12R22.5	J/18	152/149F	23.5	9.00	1096	300	3550	930	3250	930



U

Urban

- Frequent speed changes and turning
- Resistance to curb impact
- Excellent road grip and durable high mileage



U

Urban



- Five rib tread pattern provides uniform wear and excellent traction on wet and dry road.
- Deep and wide tread enhances mileage for exceptionally long tyre life
- Reinforced shoulder and steel sidewall help deliver long casing life and retreadability
- Sidewall protector ribs help resist sidewall damage from turning, backing and braking when used in urban neighborhoods.
- Cool-running compound delivers low rolloing resistance meaning more fuel efficiency



CR906

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
11R22.5	G/14	144/142J	20.0	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145J	20.0	8.25	1065	279	3150	850	2900	850
295/80R22.5	H/16	150/147M	19.0	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149L	19.0	9.00	1050	298	3550	900	3250	900
275/70R22.5	H/16	148/145J(152/148F)	20.0	8.25	964	276	3150	900	2900	900
275/70R22.5	J/18	152/148F	20.0	8.25	964	276	3550	930	3150	930



- Five rib tread pattern provides uniform wear and excellent traction on wet and dry road.
- Deep and wide tread enhances mileage for exceptionally long tyre life
- Reinforced shoulder and steel sidewall help deliver long casing life and retreadability
- Sidewall protector ribs help resist sidewall damage from turning, backing and braking when used in urban neighborhoods.
- Cool-running compound delivers low rolloing resistance meaning more fuel efficiency



CR960E

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
8.25R20	H/16	139/137K	17.0	6.5	974	236	2430	930	2300	930
10.00R20	H/16	146/143K	19.0	7.5	1054	278	3000	830	2725	830
10.00R20	J/18	149/146J	19.0	7.5	1054	278	3250	930	3000	930
11R22.5	G/14	144/142J	23.0	8.25	1065	279	2800	720	2650	720
11R22.5	H/16	148/145J	23.0	8.25	1065	279	3150	850	2900	850
295/80R22.5	H/16	150/147J	23.0	9.00	1050	298	3350	830	3075	830
295/80R22.5	J/18	152/149J	23.0	9.00	1050	298	3550	900	3250	900
275/70R22.5	H/16	148/145J	22.0	8.25	964	276	3150	900	2900	900
275/70R22.5	J/18	152/148J	22.0	8.25	964	276	3550	930	3150	930



W

Winter

TRUCK & BUS RADIAL TYRES

TRUCK & BUS RADIAL TYRES



W Winter



NEW

- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



AZ780

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
6.50R16	F/12	110/105L	13.5	5.50F	750	185	1060	670	925	670
7.00R16	G/14	118/114L	14.0	5.50F	785	200	1320	770	1180	770



NEW

- Strong biting edges guarantee excellent traction on dry and slippery road surface, especially in winter
- Specific tread compound offer good mileage without scarifying wet traction
- Wide open shoulder deliver additional traction without compromising tread life



AZ782

Size	LR / PR	Service index	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
							Single (KG)	Single (KPA)	Dual (KG)	Dual (KPA)
11R22.5	G/14	144/142L	16.0	8.25	1054	279	2800	720	2650	720
11R22.5	H/16	148/145L	16.0	8.25	1054	279	3150	850	2900	850

On-Road Highway Service
On/Off Road Service
Super Duty On/Off Road Service

TRUCK & BUS BIAS TYRES

On-Road Highway Service

On-Road Highway Service



CR940

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
11.00-22	H/16	15.0	8.00	1135	293	3480	710	3055	740



CR953

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
11.00-22	H/16	15.0	8.00	1135	293	3480	710	3055	740



CR948

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
7.00-20	G/14	13.0	5.50	904	200	1750	840	1550	770
7.50-20	G/14	13.5	6.00	935	215	1885	810	1655	740
9.00-20	H/16	14.0	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	14.0	7.50	1055	278	3000	810	2650	740
11.00-20	J/18	15.0	8.00	1085	293	3650	910	3150	840



CR990

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
7.50-20	G/14	12.5	6.00	935	215	1885	810	1655	740
11.00-20	J/18	15.5	8.00	1085	293	3650	910	3150	840



CR952

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
9.00-20	H/16	17.5	7.00	1038	259	2900	880	2500	810
10.00-20	H/16	19.0	7.50	1073	278	3000	810	2650	740
10.00-20	J/18	19.0	7.50	1073	278	3350	910	2900	840
11.00-20	H/16	19.0	8.00	1105	293	3350	810	2900	740
11.00-20	J/18	19.0	8.00	1105	293	3650	910	3150	840



CR992

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
7.50-20	G/14	15.5	6.00	935	215	1885	810	1655	740
8.25-20	G/14	16.5	6.50	974	235	2205	810	1940	740
9.00-20	H/16	15.0	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	16.0	7.50	1055	278	3000	810	2650	740
11.00-20	J/18	16.0	8.00	1085	293	3650	910	3150	840
12.00-20	J/18	16.0	8.50	1125	315	3750	810	3350	740

On-Road Highway Service

On-Road Highway Service



CR949/A

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
9.00-20	H/16	15.0	7.00	1018	259	2900	880	2500	810
9.00-20	J/18	16.0	7.50	1055	278	3000	810	2650	740
10.00-20	H/16	16.0	7.50	1055	278	3000	810	2650	740
10.00-20	J/18	16.0	7.50	1055	278	3350	910	2900	840



CR936

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
11.00-20	H/16	15.0	8.00	1085	293	3350	810	2900	740
11.00-20	J/18	15.0	8.00	1085	293	3650	910	3150	840
12.00-20	J/18	15.0	8.50	1125	315	3750	810	3350	740
12.00-24	J/18	16.0	8.50	1225	315	4195	810	3680	740



CR942

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
8.25-20	G/14	14.0	6.50	974	235	2205	810	1940	740
8.25-20	H/16	14.0	6.50	974	235	2430	910	2180	840
9.00-20	G/14	14.0	7.00	1018	259	2575	770	2300	700
9.00-20	H/16	15.0	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	15.0	7.50	1055	278	3000	810	2650	740



CL928

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
9.00-20	G/14	14.5	7.00	1018	259	2575	770	2255	700
9.00-20	H/16	14.5	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	15.0	7.50	1055	278	3000	810	2650	740
11.00-20	H/16	17.0	8.00	1085	293	3350	810	2900	740
11.00-20	J/18	17.0	8.00	1085	293	3650	910	3150	840
12.00-20	J/18	17.0	8.50	1125	315	3750	810	3350	740
12.00-24	J/18	17.0	8.50	1225	315	4195	810	3680	740



CL951

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
7.00-20	G/14	13.0	5.50	904	200	1750	840	1550	770
7.50-20	G/14	14.0	6.00	935	215	1885	810	1655	740
8.25-20	G/14	14.0	6.50	974	235	2205	810	1940	740
9.00-20	H/16	16.0	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	16.0	7.50	1055	278	3000	810	2650	740
11.00-20	J/18	17.0	8.00	1085	293	3650	910	3150	840
12.00-20	J/18	17.5	8.50	1145	315	3750	810	3350	740
13.00-20	J/18	19.0	9.00	1177	340	4205	770	3690	700
14.00-20	J/18	19.0	10.00	1240	375	4525	670	3970	600
12.00-24	J/18	17.5	8.50	1225	315	4195	810	3680	740

On/Off Road Service

On/Off Road Service



CL946

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
9.00-20	G/14	16.0	7.00	1018	259	2575	770	2255	700
9.00-20	H/16	16.0	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	17.0	7.50	1055	278	3000	810	2650	740
11.00-20	H/16	17.0	8.00	1085	293	3350	810	2900	740
11.00-20	J/18	17.0	8.00	1085	293	3650	910	3150	840
12.00-20	J/18	18.0	8.50	1125	315	3750	810	3350	740
12.00-20	L/20	18.0	8.50	1125	315	4000	880	3450	810



CL908

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
14.00-20	J/18	20.0	10.00	1204	375	4525	670	3970	600
14.00-20	20PR	20.0	10.00	1240	375	5825	1000	5165	930
14.00-20	24PR	20.0	10.00	1240	375	4525	670	3970	600



CL969

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
11.00-20	J/18	23.0	8.00	1105	293	3650	910	3150	840
11.00-20	L/20	23.0	8.00	1105	293	3875	1010	3350	940
12.00-20	J/18	23.0	8.50	1125	315	3750	810	3350	740
12.00-20	L/20	23.0	8.50	1125	315	4000	880	3450	810
12.00-24	J/18	23.0	8.50	1225	315	4195	810	3680	740
12.00-24	L/20	23.0	8.50	1225	315	4500	880	4000	810



CL991

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
9.00-20	H/16	26.0	7.00	1038	259	2900	880	2500	810
9.00-20	H/16	28.0	7.50	1073	278	3000	810	2650	740
10.00-20	J/18	28.0	7.50	1073	278	3350	910	2900	840
11.00-20	H/16	30.0	8.00	1105	293	3350	810	2900	740
11.00-20	J/18	30.0	8.00	1105	293	3650	910	3150	840
12.00-20	J/18	30.0	8.50	1145	315	3750	810	3350	740
12.00-24	L/20	30.0	8.50	1145	315	4000	880	3450	810

Super Duty On/Off Road Service



CL891

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
6.50-16	F/12	18.0	5.50F	761	185	1060	630	925	630
7.00-16	G/14	18.0	5.50F	785	200	1320	730	1180	730
7.50-16	G/14	18.0	6.00G	825	212	1500	730	1320	730
8.25-16	H/16	19.0	6.50H	855	235	1800	730	1600	730



CL956

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
9.00-20	H/16	20.0	7.00	1018	259	2900	880	2500	810
10.00-20	H/16	22.0	7.50	1073	278	3000	810	2650	740
10.00-20	J/18	22.0	7.50	1073	278	3350	910	2900	840
11.00-20	H/16	22.0	8.00	1105	293	3350	810	2900	740
11.00-20	J/18	22.0	8.00	1105	293	3650	910	3150	840
12.00-20	J/18	22.0	8.50	1125	315	3750	810	3350	740



CL909

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single		Dual	
						(KG)	(KPA)	(KG)	(KPA)
9.00-20	H/16	20.0	7.00	1018	259	2900	880	2500	810
11.00-20	J/18	22.0	8.00	1085	293	3650	910	3150	840
12.00-20	J/18	23.0	8.50	1125	315	3750	810	3350	740

Mini Light Truck - Bias
On-Road Service

Mini Light Truck - Bias



Mini Light Truck - Bias



CM882

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
6.40/6.50-13	C/6	15.0	4 1/2J	624	168	600	350	-	-



CR831

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
4.50-12	D/8	8.0	3.00B	545	127	415	400	395	400



CL827

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
6.00-13	D/8	10.0	4.50B	655	170	650	420	580	420



CR850

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
5.00-12	D/8	8.5	3.50B	568	143	487	400	462	400



CL830

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
6.00-13	D/8	10.0	4.50B	655	170	650	420	580	420



CM834

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
5.00-12	E/10	8.0	3.50B	568	143	485	517	465	517
5.50-13	E/10	8.0	4.00J	520	160	630	530	555	530

Mini Light Truck - Bias



Mini Light Truck - Bias



CR218

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
6.00-12	C/6	9.0	4.50B	574	156	360	210	-	-



CR823

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
4.00-10	C/6	6.0	3.00D	470	112	320	360	-	-
5.00-10	D/8	7.5	3.50B	517	143	430	400	410	400



CR829

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
5.00-12	D/8	9.0	3.50B	568	143	485	400	465	400



CL855

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
5.00-12	E/10	9.0	3.50B	568	143	560	500	530	500
6.00-13	D/8+	11.0	4.50B	681	184	650	420	580	420



CL851

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single (KG)	(KPA)	Dual (KG)	(KPA)
6.00-13	D/8+	10.0	4 1/2J	655	170	735	530	645	530



CL839/A

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
7.00-15	E/10	9.5	5.50F	750	200	1040	530	915	530
7.00-15	F/12	9.5	5.50F	750	200	1150	630	1030	630
6.50-16	F/12	12.5	5.50F	750	185	1060	630	925	630
7.00-16	G/14	14.0	5.50F	775	200	1320	730	1180	730
7.50-16	G/14	15.0	6.00G	805	215	1500	730	1320	730
8.25-16	H/16	15.0	6.50H	855	235	1800	730	1600	730
9.00-16	G/14	16.0	6.50H	890	255	1955	630	1720	630



CL827

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
7.50-15	F/12	10.5	6.00G	780	215	1360	630	1215	630
6.00-16	E/10	10.0	4.50E	730	170	860	530	755	530
6.50-16	E/10	10.0	5.50F	750	185	975	530	860	530
7.00-16	E/10	12.0	5.50F	775	200	1100	530	965	530
7.50-16	G/14	13.0	6.00G	805	215	1500	730	1320	730
8.25-16	G/14	14.0	6.50H	855	235	1705	630	1500	630



CL856

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
7.50-16	G/14	18.0	6.00G	825	212	1500	730	1320	730
7.50-16	H/16	18.0	6.00G	825	212	1580	760	1390	760



CL830

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
6.00-14	D/8	10.0	4 1/2J	680	170	690	420	600	420
7.50-16	F/12	14.0	6.00G	805	215	1400	630	1250	630
7.50-16	G/14	14.0	6.00G	805	215	1500	730	1320	730



CR832

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
6.00-14	D/8	7.5	4 1/2J	680	170	685	420	600	420
6.50-14	D/8	7.5	4 1/2J	705	180	785	420	690	420
6.00-15	D/8+	8.0	4.50E	705	170	730	420	630	420
6.50-15	D/8	8.5	4.50E	730	180	825	420	730	420
7.00-15	E/10	10.0	5.50F	750	200	1040	530	915	530
7.00-15	F/12	10.0	5.50F	750	200	1150	630	1030	630
6.50-16	E/10	9.0	5.50F	750	185	975	530	860	530
6.50-16	F/12	9.0	5.50F	750	185	1060	630	925	630
7.00-16	E/10	10.5	5.50F	775	200	1090	530	950	530
7.00-16	F/12	10.5	5.50F	775	200	1215	630	1060	630
7.00-16	G/14	10.5	5.50F	775	200	1320	730	1180	730
7.50-16	F/12	10.0	6.00G	805	215	1405	630	1240	630
7.50-16	G/14	10.0	6.00G	805	215	1500	730	1320	730



CR852

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
6.50-14	D/8+	8.0	4 1/2J	705	180	775	420	690	420
6.50-14	E/10	8.0	4 1/2J	705	180	900	530	800	530
7.50-15	F/12	10.5	6.00G	780	215	1370	630	1210	630
6.50-16	F/12	10.5	5.50F	750	185	1060	630	925	630
7.50-16	G/14	13.5	6.00G	815	215	1500	730	1320	730
7.50-16	H/16	13.5	6.00G	815	215	1500	730	1320	730
8.25-16	G/14	11.5	6.50H	855	235	1700	630	1500	630



CL851

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
7.00-15	F/12	11.0	5.50F	750	200	1150	630	1030	630



CL838

Size	LR / PR	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure			
						Single	Dual		
						(KG)	(KPA)	(KG)	(KPA)
7.50-16	D/8	12.5	6.00G	816	215	1120	420	975	420