



# **WINDFORCE**

**TBR TIRES**

**ENJOY YOUR TRIPS WITH  
WINDFORCE TYRES**

**CATALOGUE 2017**



# Manufacture Introduction



***SHANDONG HAOHUA TIRE CO., LTD.***

ShanDong HaoHua Tire Co., LTD (hereinafter Haohua) is located in Weifang Binhai Economic-Technological Development Area, which is a beautiful national economic belt around Bohai District, Haohua was founded in 2011 with the total covering area of 1,000,000 square meters and the total construction area of 600,000 square meters, and Haohua actively reflects the green idea in all respects as a large modern enterprise.

Haohua has the advanced research and development capabilities, excellent production process, modern test equipments, and the professional technical management team (the general situation of the team members is that the average work experience in tire industry is about 15 years, including two senior economists, five senior engineers, 16 mid-class engineers, three doctors, and five masters).

**Location:** Shandong Weifang Binhai Industrial Area

**Floor Area:** 1,000,000M<sup>2</sup> Including 3 workshop, 3 warehouse and 2 office.

**Total Capability:** 20Million PCR & 2Million TBR per Year

**Investments:** 400Million US\$     **Staffs:** 4000 persons +/-

**Equipments:** First class equipments from Germany, Holland, Japan and China.

**Approved Quality Standards:** ISO/DOT/ECE/GCC/INMETRO

**Main Values:** Green, Safety and Economy.





# Company Introduction

## **WINDFORCE TYRE CO., LIMITED**

Based on Shandong HaoHua tire manufacture, who located in ShouGuang Shandong, WINDFORCE TYRE CO., LIMITED is built as the sales company to develop the **WINDFORCE** brand tyres worldwide upon 100% exclusivity. We mainly specialize in designing and supplying all kinds of Radial tyres, including Passenger Car tyres, SUV tyres, Light Truck Tyres, Truck and Bus tyres etc.

Enjoying high popularity in both domestic and international markets, **WINDFORCE** is made as a high quality level brand from China. **WINDFORCE** brand owns big ranges of PCR, LTR, A/T, H/T, M/T, VAN and TBR tyres. All the patterns are designed according to the latest markets requirements by our smart R&D team. All the tyres are produced under the first class equipments and strict quality management system to ensure the stable quality.

With high quality, reasonable price and excellent service, we are able to be one of your best tyres suppliers and long term of business partners.

Thanks very much for your attention and time.





# TBR Certificates

## SMART-WAY<WH1020>



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
Washington, DC 20460

AUG - 3 2011

OFFICE OF  
AIR AND WASTE TOXICS

Mr. Ran Wang  
Shandong Haohua Tire Co., Ltd.  
Dadi Road West, Xinhai Road North, Houshen Industry Zone  
Shouguang City Shandong Province  
China

Dear Mr. Wang:

The U.S. Environmental Protection Agency (EPA) has reviewed Shandong Haohua Tire Co., Ltd.'s request for verification of the WINDFORCE WH1020 tire for use on line-haul class-8 tractor trailers. Based upon your application and data provided, you have demonstrated that the coefficient of rolling resistance of the subject tire meets the requirements of the SmartWay Technology Program. The subject tire achieves the appropriate target values for the axle positions indicated and can be considered a low rolling resistance tire. In prior testing, EPA has determined that certain low rolling resistance tire models when used on all five axles of line-haul class-8 tractor trailers can reduce SO<sub>2</sub> emissions and improve fuel consumption by over 3 percent. Based on our evaluation of your verification application and data provided, EPA hereby verifies that this product meets the low rolling resistance tire performance criteria for new tires.

The following product is approved as a Verified Low Rolling Resistance Tire in the SmartWay Technology Program:

Requestor: Shandong Haohua Tire Co., Ltd.  
Tire Manufacturer: Shandong Haohua Tire Co., Ltd.  
Tire Brand and Model: WINDFORCE WH1020  
LNAVIGATOR S201

Test Method: ESO28580  
Axle Positions Qualifying for Verification: Steer

The following operating criteria must be met in order for trucks to achieve the aforementioned benefits:

1. Tires are used on the axle position(s) stated above on a line-haul class-8 tractor trailer.

2. Verified low rolling resistance tires must be installed on all axle positions of the tractor and trailer.
3. All tires must be properly inflated according to the manufacturer's specifications.

Information on the tires listed above will be posted on the EPA's Verified Technology List website at: <http://www.epa.gov/smartway/forpartners/technology.htm>. If the tire models listed above are modified from the application description provided to EPA and representative of products tested, you must notify EPA immediately. This verification does not automatically confer to modified tires that are similar to this original verification.

As a manufacturer of EPA SmartWay verified technologies, your organization plays a unique role in the SmartWay program. Shandong Haohua Tire Co., Ltd. produces the technologies that provide emissions reduction and fuel saving benefits when used properly in their designed applications. These technologies are used by SmartWay Partners and other businesses to help support their performance goals. The enclosed document contains communication guidelines for manufacturers of EPA SmartWay verified technologies. If you have questions regarding these policies, please consult the enclosed communications policy summary or you may contact Joann Jackson-Stephens directly at [jackson-stephens.joann@epa.gov](mailto:jackson-stephens.joann@epa.gov).

Thank you for participating in EPA's Technology Verification Program. If you have any questions or comments, please contact L. Joseph Bachman, of my staff, at 202-343-9173.

Sincerely,

Karl Simons, Director  
Transportation and Climate Division  
Office of Transportation and Air Quality

Enclosure

## SMART-WAY<WD2000>



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
Washington, DC 20460

OCT - 4 2011

OFFICE OF  
AIR AND WASTE TOXICS

Mr. Ran Wang  
Shandong Haohua Tire Co., Ltd.  
Dadi Road West, Xinhai Road North, Houshen Industry Zone  
Shouguang City Shandong Province  
P. R. China

Dear Mr. Wang:

The U.S. Environmental Protection Agency (EPA) has reviewed Shandong Haohua Tire Co., Ltd.'s request for verification of the WINDFORCE WD2000 tire for use on line-haul class-8 tractor trailers. Based upon your application and data provided, you have demonstrated that the coefficient of rolling resistance of the subject tire meets the requirements of the SmartWay Technology Program. The subject tire achieves the appropriate target values for the axle positions indicated and can be considered a low rolling resistance tire. In prior testing, EPA has determined that certain low rolling resistance tire models when used on all five axles of line-haul class-8 tractor trailers can reduce SO<sub>2</sub> emissions and improve fuel consumption by over 3 percent. Based on our evaluation of your verification application and data provided, EPA hereby verifies that this product meets the low rolling resistance tire performance criteria for new tires.

The following product is approved as a Verified Low Rolling Resistance Tire in the SmartWay Technology Program:

Requestor: Shandong Haohua Tire Co., Ltd.  
Tire Manufacturer: Shandong Haohua Tire Co., Ltd.  
Tire Brand and Model: WINDFORCE WD2000  
CRATOS CRD220  
APLUS D808

Test Method: ESO28580  
Axle Positions Qualifying for Verification: Steer

The following operating criteria must be met in order for trucks to achieve the aforementioned benefits:

1. Tires are used on the axle position(s) stated above on a line-haul class-8 tractor trailer.
2. Verified low rolling resistance tires must be installed on all axle positions of the tractor and trailer.
3. All tires must be properly inflated according to the manufacturer's specifications.

Information on the tires listed above will be posted on the EPA's Verified Technology List website at: <http://www.epa.gov/smartway/forpartners/technology.htm>. If the tire models listed above are modified from the application description provided to EPA and representative of products tested, you must notify EPA immediately. This verification does not automatically confer to modified tires that are similar to this original verification.

As a manufacturer of EPA SmartWay verified technologies, your organization plays a unique role in the SmartWay program. Shandong Haohua Tire Co., Ltd. produces the technologies that provide emissions reduction and fuel saving benefits when used properly in their designed applications. These technologies are used by SmartWay Partners and other businesses to help support their performance goals. The enclosed document contains communication guidelines for manufacturers of EPA SmartWay verified technologies. If you have questions regarding these policies, please consult the enclosed communications policy summary or you may contact Joann Jackson-Stephens directly at [jackson-stephens.joann@epa.gov](mailto:jackson-stephens.joann@epa.gov).

Thank you for participating in EPA's Technology Verification Program. If you have any questions or comments, please contact L. Joseph Bachman, of my staff, at 202-343-9373.

Sincerely,

Karl Simons, Director  
Transportation and Climate Division  
Office of Transportation and Air Quality

Enclosure

# TBR Certificates

**ECE <WH1020>**

**117ROADKING**

Concerning:  
- approval granted  
- approval extended  
- approval withdrawn  
- production definitively discontinued

of a type of tyre with regard to 'rolling sound emission level' and/or 'adhesion performance on wet surfaces' and/or 'rolling resistance' pursuant to Regulation number 117.

Approval number: E4-117R-027485-S20 R2 Extension number: 00

1. Manufacturer's name and address(es): SHANDONG HAOCHUA TYRE Co., Ltd.  
Dadi Road, West Xinhai Road North, Houshan  
Industry zone, Shouguang city, Shandong  
Province, P.R. China

2. If applicable, name and address of manufacturer's representative: not applicable

3. 'Type class' and 'category of use' of the type of tyre: Class C1+Class C2+Class C3  
non-seasonal

4. Brand(s) name(s) and/or Trade description(s) of the type of tyre: WINDFORCE, LANVIGATOR, APLUS,  
W101420

5. Technical service and, where appropriate, test laboratory approved for purposes of approval or of verification of conformity with: TÜV NORD Mobilität GmbH & Co. KG  
Institut für Fahrzeugtechnik und Mobilität  
Aldersloh 7  
D-42699 Solen

Page 1 of 2

Approval number: E4-117R-027485-S20 R2 Extension number: 00

6. Performance(s) approved: sound level at stage 4 stage 21<sup>(1)</sup>, wet adhesion level, rolling resistance level stage 4 stage 21<sup>(2)</sup>

6.1. Sound level of the representative tyre size, as per item 1.6. of the test report in the appendix to Annex 3: 77<sup>(3)</sup> dB(A) at reference speed of 70 km/h<sup>(4)</sup>

6.2. Wet adhesion level of the representative tyre size, as per item 1.7. of the test report in the appendix to Annex 3: 1.10 (1) using the vehicle or trailer method<sup>(5)</sup>

6.3. Rolling resistance level of the representative tyre size, as per item 1.8. of the test report in the appendix to Annex 3: 4.00 N/kN<sup>(6)</sup>

7. Number of report issued by that service: CS117-A6-2015-02087

8. Date of report issued by that service: September 01, 2015

9. Reason(s) of extension (if applicable): Not applicable

10. Any remarks: --

11. Place: Zwettow

12. Date: 10-SEP-2015

13. Signature:   
R.F.R. Clement

14. Answered to this communication on:

14.1. A list of documents in the approval file deposited at the Administration services having delivered the approval and which can be obtained upon request<sup>(7)</sup>.

14.2. A list of trade-pattern designations: Specify for each trademark or brand name and trade description the list of tyre size designations, adding in case of Class C3 tyres the mark 'interford' (or 'extra load') or the speed symbol of more than 160 in the case of tyre of Classes C2 and C3, the mark 'seasonal', if so required by paragraph 3.3. of this Regulation.

Page 2 of 2

**ECE <WD2020>**

**117ROADKING**

Concerning:  
- approval granted  
- approval extended  
- approval withdrawn  
- production definitively discontinued

of a type of tyre with regard to 'rolling sound emission level' and/or 'adhesion performance on wet surfaces' and/or 'rolling resistance' pursuant to Regulation number 117.

Approval number: E4-117R-027486-S20 R2 Extension number: 00

1. Manufacturer's name and address(es): SHANDONG HAOCHUA TYRE Co., Ltd.  
Dadi Road, West Xinhai Road North, Houshan  
Industry zone, Shouguang city, Shandong  
Province, P.R. China

2. If applicable, name and address of manufacturer's representative: not applicable

3. 'Type class' and 'category of use' of the type of tyre: Class C1+Class C2+Class C3  
non-seasonal

4. Brand(s) name(s) and/or Trade description(s) of the type of tyre: WINDFORCE, LANVIGATOR, APLUS,  
W101100

5. Technical service and, where appropriate, test laboratory approved for purposes of approval or of verification of conformity with: TÜV NORD Mobilität GmbH & Co. KG  
Institut für Fahrzeugtechnik und Mobilität  
Aldersloh 7  
D-42699 Solen

Page 1 of 2

Approval number: E4-117R-027486-S20 R2 Extension number: 00

6. Performance(s) approved: sound level at stage 4 stage 21<sup>(1)</sup>, wet adhesion level, rolling resistance level stage 4 stage 21<sup>(2)</sup>

6.1. Sound level of the representative tyre size, as per item 1.6. of the test report in the appendix to Annex 3: 77<sup>(3)</sup> dB(A) at reference speed of 70 km/h<sup>(4)</sup>

6.2. Wet adhesion level of the representative tyre size, as per item 1.7. of the test report in the appendix to Annex 3: 1.02 (1) using the vehicle or trailer method<sup>(5)</sup>

6.3. Rolling resistance level of the representative tyre size, as per item 1.8. of the test report in the appendix to Annex 3: 5.77 N/kN<sup>(6)</sup>

7. Number of report issued by that service: CS117-A6-2015-03088

8. Date of report issued by that service: October 16, 2015

9. Reason(s) of extension (if applicable): Not applicable

10. Any remarks: --

11. Place: Zwettow

12. Date: 02-NOV-2015

13. Signature:   
J. Willems

14. Answered to this communication on:

14.1. A list of documents in the approval file deposited at the Administration services having delivered the approval and which can be obtained upon request<sup>(7)</sup>.

14.2. A list of trade-pattern designations: Specify for each trademark or brand name and trade description the list of tyre size designations, adding in case of Class C3 tyres the mark 'interford' (or 'extra load') or the speed symbol of more than 160 in the case of tyre of Classes C2 and C3, the mark 'seasonal', if so required by paragraph 3.3. of this Regulation.

Page 2 of 2






# **WINDFORCE**

## **TBR TIRES**

**ENJOY YOUR TRIPS WITH  
WINDFORCE TYRES**



# TYPE OF OPERATION

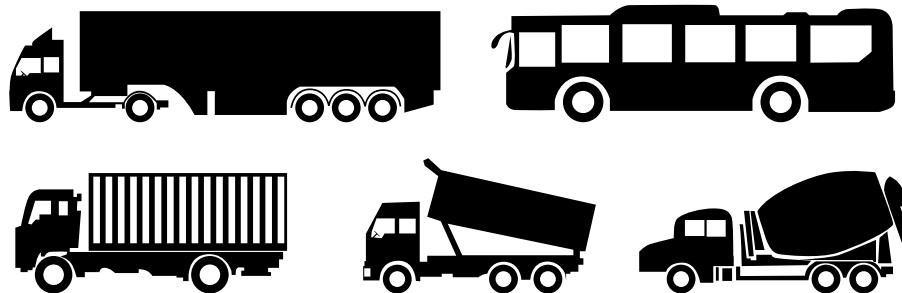

## LONG HAUL



WD2000



WD2020



WD2082



WD2062+



WH1000



WH1020



WH1022



WT3020



## REGIONAL



WD2020



WD2068



WD2060



WD2048



WA1060



WA1068



WA1082



WA1066



## ON & OFF



WA1060



WA1062+



WA1068



WA1082



WD2066



WD2062+



WD2088




WD2068

Enjoy your Trips with **WINDFORCE** Tyres

# WH1020 WH1020+



## EU LABELLING

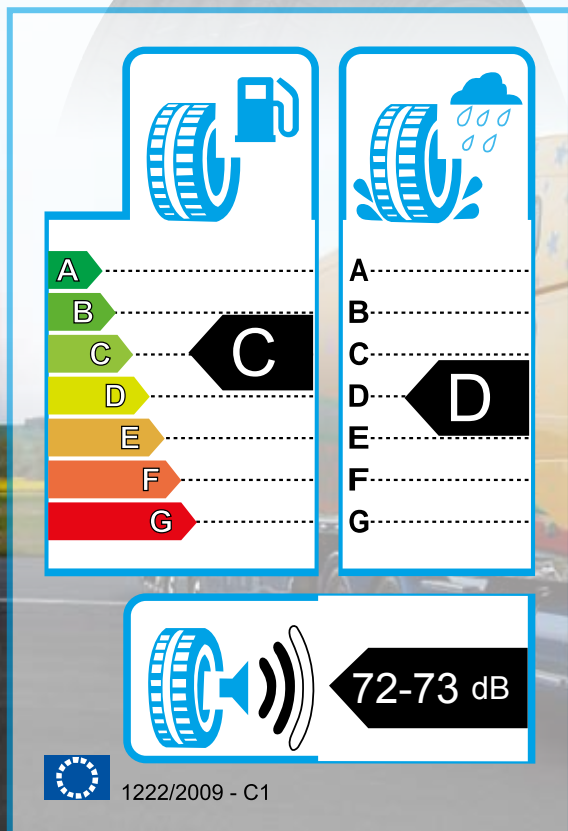






① Application: Steer Wheel for long distance, also can be used on Trailer Wheel.

② Suitable for high speed on good road surface application, with excellent durability, anti-side wear performance.

③ Longer mileage, Lower noise, Good stone-picking prevention.

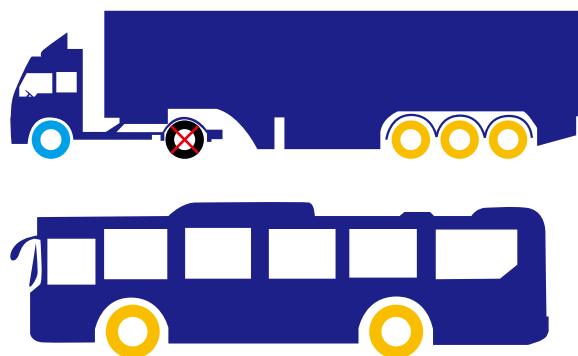

- Standard Wheel
- Permitted Wheel
- ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description    | Ply Rating | Tread Depth |       | Standard Rim | Section Width (mm) | OA Diameter (mm) | Max. Pressure (kpa/PSI) |  |  |  |  |
|----------|----------------------|------------|-------------|-------|--------------|--------------------|------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          |                      |            | MM          | 1/32" |              |                    |                  |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| H1020R01 | 205/75R17.5 124/122M | 16         | 12.0        | 15.0  | 6.00         | 212                | 749              | 760                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R02 | 215/75R17.5 127/124M | 16         | 12.0        | 15.0  | 6.00         | 222                | 761              | 760                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R03 | 225/75R17.5 129/127M | 16         | 12.0        | 15.0  | 6.75         | 222                | 776              | 760                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R04 | 235/75R17.5 132/130M | 16         | 12.5        | 15.8  | 6.75         | 242                | 792              | 775                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R05 | 245/70R17.5 136/134M | 16         | 12.5        | 15.8  | 7.50         | 249                | 781              | 830                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R06 | 225/70R19.5 128/126M | 14         | 12.5        | 15.8  | 6.75         | 225                | 804              | 760                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R07 | 245/70R19.5 136/134M | 16         | 12.5        | 15.8  | 7.50         | 249                | 832              | 830                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R08 | 265/70R19.5 140/138M | 16         | 13.5        | 17.0  | 7.50         | 259                | 866              | 775                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R09 | 285/70R19.5 146/144M | 16         | 13.5        | 17.0  | 8.25         | 287                | 888              | 850                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R10 | 275/70R22.5 148/145M | 16         | 14.5        | 18.2  | 8.25         | 276                | 958              | 900                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R25 | 11R22.5 148/145M     | 16         | 14.5        | 18.2  | 8.25         | 279                | 1050             | 830                     | C                                                                                     | D                                                                                     |  | 72                                                                                    |
| H1020R14 | 295/75R22.5 146/143M | 16         | 14.5        | 18.2  | 9.00         | 298                | 1014             | 830                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |
| H1020R15 | 295/80R22.5 152/149M | 18         | 15.5        | 19.6  | 9.00         | 298                | 1044             | 900                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |
| H1020R16 | 12R22.5 152/149M     | 18         | 15.5        | 19.6  | 9.00         | 300                | 1084             | 930                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |
| H1020R17 | 315/70R22.5 154/150M | 20         | 15.0        | 19.0  | 9.00         | 312                | 1014             | 900                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |
| H1020R18 | 315/80R22.5 156/150M | 20         | 15.5        | 19.6  | 9.00         | 312                | 1076             | 850                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |
| H1020R19 | 385/55R22.5 160L     | 20         | 16.0        | 20.2  | 12.25        | 386                | 996              | 900                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |
| H1020R20 | 385/65R22.5 160L     | 20         | 16.0        | 20.2  | 11.75        | 389                | 1072             | 900                     | C                                                                                     | D                                                                                     |  | 73                                                                                    |

\* New Developing Sizes

The labelling information is subject to change without notice.



Enjoy your Trips with **WINDFORCE** Tyres

# WD2020

# WD2020+



## EU LABELLING

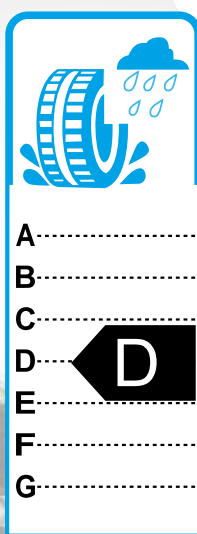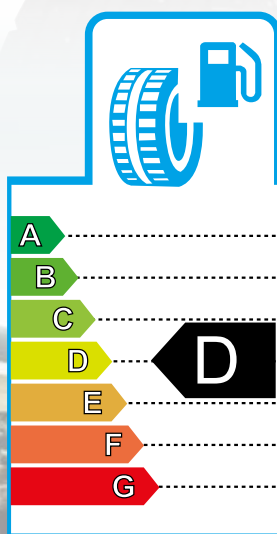

74-75 dB



1222/2009 - C1








① Application: Drive Wheel for medium mileage load series.

② Open Shoulder designs, the block pattern offer excellent drive force and anti-peeling performance on paved and unpaved roads.

③ Excellent load capability, Longer mileage, Super Durability.

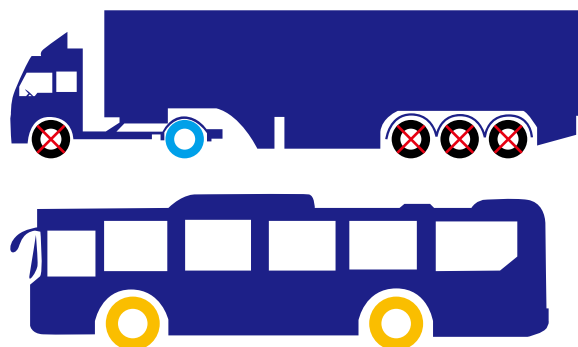

- Standard Wheel
- Permitted Wheel
- ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description    | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |   |   |  | dB |
|----------|----------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---|---|--|----|
| D2020R01 | 205/75R17.5 124/122K | 16         | 15.0 19.0               | 6.00         | 212                   | 753                  | 760                        | D | D |  | 74 |
| D2020R02 | 215/75R17.5 127/124K | 16         | 15.0 19.0               | 6.00         | 222                   | 765                  | 760                        | D | D |  | 74 |
| D2020R03 | 225/75R17.5 129/127K | 16         | 15.0 19.0               | 6.75         | 222                   | 782                  | 760                        | D | D |  | 74 |
| D2020R04 | 235/75R17.5 132/130K | 16         | 15.5 19.6               | 6.75         | 242                   | 797                  | 775                        | D | D |  | 74 |
| D2020R05 | 245/70R17.5 136/134K | 16         | 15.5 19.6               | 7.50         | 249                   | 787                  | 850                        | D | D |  | 74 |
| D2020R06 | 225/70R19.5 128/126K | 14         | 15.5 19.6               | 6.75         | 249                   | 807                  | 760                        | D | D |  | 74 |
| D2020R07 | 245/70R19.5 136/134K | 16         | 15.5 19.6               | 7.50         | 249                   | 838                  | 830                        | D | D |  | 74 |
| D2020R08 | 265/70R19.5 140/138K | 16         | 16.0 20.2               | 7.50         | 259                   | 869                  | 775                        | D | D |  | 74 |
| D2020R09 | 285/70R19.5 146/144K | 16         | 16.0 20.2               | 8.25         | 287                   | 893                  | 850                        | D | D |  | 74 |
| D2020R10 | 275/70R22.5 148/145M | 16         | 20.0 25.2               | 8.25         | 276                   | 958                  | 900                        | D | D |  | 74 |
| D2020R12 | 11R22.5 148/145M     | 16         | 20.0 25.2               | 8.25         | 279                   | 1050                 | 830                        | D | D |  | 74 |
| D2020R14 | 295/75R22.5 146/143K | 16         | 20.0 25.2               | 9.00         | 298                   | 1014                 | 830                        | D | D |  | 75 |
| D2020R15 | 295/80R22.5 152/149M | 18         | 20.0 25.2               | 9.00         | 298                   | 1044                 | 900                        | D | D |  | 75 |
| D2020R16 | 12R22.5 152/149K     | 18         | 20.0 25.2               | 9.00         | 300                   | 1084                 | 930                        | D | D |  | 75 |
| D2020R17 | 315/70R22.5 154/150M | 20         | 20.0 25.2               | 9.00         | 312                   | 1014                 | 900                        | D | D |  | 75 |
| D2020R18 | 315/80R22.5 156/150M | 20         | 20.0 25.2               | 9.00         | 312                   | 1076                 | 850                        | D | D |  | 75 |
| D2020R19 | 11.00R20 152/149K    | 16         | 20.0 25.2               | 8.00         | 293                   | 1085                 | 900                        | D | D |  | 75 |
| D2020R20 | 10.00R20 149/146K    | 18         | 20.0 25.2               | 7.50         | 278                   | 1054                 | 930                        | D | D |  | 75 |

★ New Developing Sizes


The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P5-6

# WA 1060

## EU LABELLING

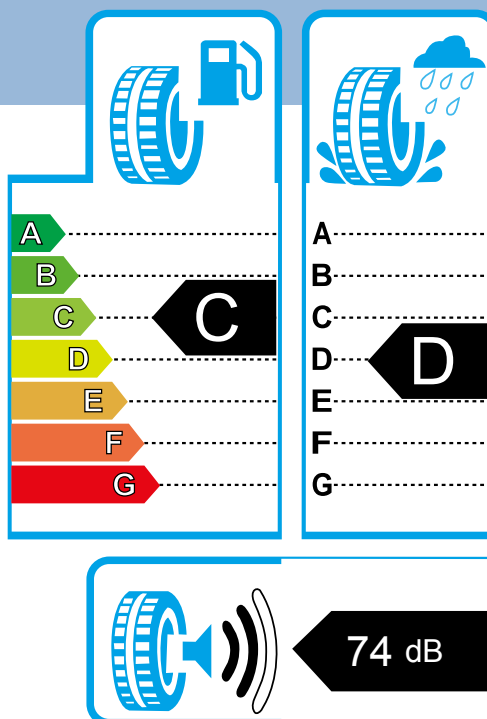

1222/2009 - C1







① Application: All Position Wheels for On/Off use.

② Mixed pattern, Suitable for mixed road surface and relatively poor road condition with sideslip resistance.

③ Excellent crack & tear resistance, High speed, Long mileage.



-  Standard Wheel
-  Permitted Wheel
-  Prohibited Wheel

## M+S

| Item No. | Sizes Description    | Ply Rating | Tread Depth |       | Standard Rim | Section Width (mm) | O.A. Diameter (mm) | Max. Pressure (kpa/PSI) |  |  |  |  |
|----------|----------------------|------------|-------------|-------|--------------|--------------------|--------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          |                      |            | MM          | 1/32" |              |                    |                    |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| A1060R15 | 11R22.5 148/145M     | 16         | 15.0        | 19.0  | 8.25         | 279                | 1050               | 830                     | C                                                                                     | D                                                                                     |  | 74                                                                                    |
| A1060R11 | 295/80R22.5 152/149M | 18         | 15.0        | 19.0  | 9.00         | 298                | 1044               | 900                     | C                                                                                     | D                                                                                     |  | 74                                                                                    |
| A1060R03 | 12R22.5 152/149M     | 18         | 15.0        | 19.0  | 9.00         | 300                | 1084               | 930                     | C                                                                                     | D                                                                                     |  | 74                                                                                    |
| A1060R04 | 315/80R22.5 156/150M | 20         | 15.0        | 19.0  | 9.00         | 312                | 1076               | 850                     | C                                                                                     | D                                                                                     |  | 74                                                                                    |
| A1060R05 | 13R22.5 156/150L     | 20         | 15.0        | 19.0  | 9.75         | 320                | 1124               | 875                     | C                                                                                     | D                                                                                     |  | 74                                                                                    |

\* New Developing Sizes


The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P7-8

# WD 2060

## EU LABELLING

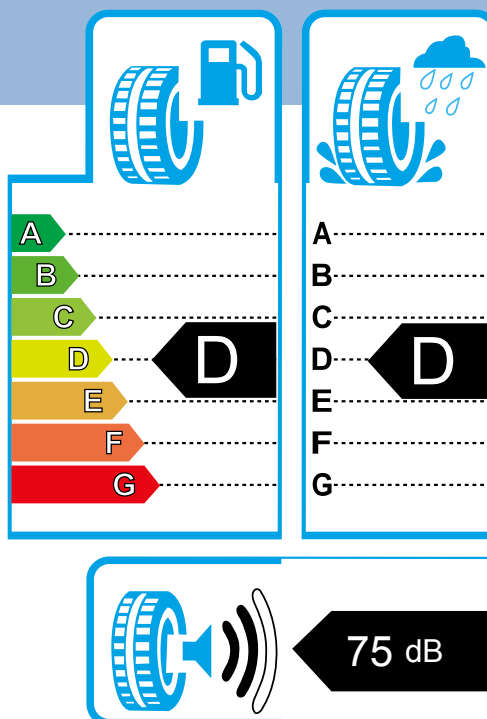

1222/2009 - C1









# WH 1000



① Application: Trailer Wheel for long distance, also can be used on Steer Wheel.

② Suitable for high speed on good road surface application, with excellent anti-wet property and side-slip resistance.

③ Longer mileage, Lower noise, Lower rolling resistance.



Smartway Certificated





● Standard Wheel

● Permitted Wheel

⊗ Prohibited Wheel

| Item No. | Sizes Description     | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |   |   |   | dB |
|----------|-----------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---|---|---|----|
| H1000R01 | 11R22.5 144/142M      | 14         | 13.0 16.4               | 8.25         | 279                   | 1050                 | 760                        | - | - | - | -  |
| H1000R02 | 11R22.5 146/143M      | 16         | 13.0 16.4               | 8.25         | 279                   | 1050                 | 830                        | - | - | - | -  |
| H1000R03 | 11R24.5 146/143M      | 14         | 12.0 15.0               | 8.25         | 279                   | 1104                 | 760                        | - | - | - | -  |
| H1000R04 | 11R24.5 149/146M      | 16         | 12.0 15.0               | 8.25         | 279                   | 1104                 | 830                        | - | - | - | -  |
| H1000R05 | 295/75R22.5 144/141M  | 14         | 12.0 15.0               | 9.00         | 298                   | 1014                 | 760                        | - | - | - | -  |
| H1000R06 | 295/75R22.5 146/143M  | 16         | 12.0 15.0               | 9.00         | 298                   | 1014                 | 830                        | - | - | - | -  |
| H1000R10 | 285/75R24.5 144/141M  | 14         | 12.0 15.0               | 8.25         | 280                   | 1050                 | 760                        | - | - | - | -  |
| H1000R11 | 285/75R24.5 147/144M  | 16         | 12.0 15.0               | 8.25         | 280                   | 1050                 | 830                        | - | - | - | -  |
| H1000R12 | *255/70R22.5 140/137M | 16         | 12.0 15.0               | 7.50         | 254                   | 925                  | 830                        | - | - | - | -  |
| H1000R07 | 295/80R22.5 152/149M  | 18         | 14.5 18.2               | 9.00         | 298                   | 1044                 | 900                        | - | - | - | -  |
| H1000R08 | 12R22.5 152/149M      | 18         | 14.5 18.2               | 9.00         | 300                   | 1084                 | 930                        | - | - | - | -  |
| H1000R09 | 315/80R22.5 156/150M  | 20         | 14.5 18.2               | 9.00         | 312                   | 1076                 | 850                        | - | - | - | -  |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                       |            |                         |              |                       |                      |                            |   |   |   |    |

\* New Developing Sizes  
The labelling information is subject to change without notice.





# WD 2000



① Application: Drive Wheel for medium mileage loading series.

② Close Shoulder designs, the block pattern offer excellent drive force and good braking performance on paved road condition.

③ Excellent load capability, Longer mileage, Super Durability.



Smartway Certificated





## M+S

 Standard Wheel

 Permitted Wheel

 Prohibited Wheel

| Item No. | Sizes Description    | Ply Rating | Tread Depth<br>MM 1/32" |      | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  | dB |
|----------|----------------------|------------|-------------------------|------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----|
| D2000R01 | 11R22.5 144/142K     | 14         | 20.0                    | 25.2 | 8.25         | 279                   | 1050                 | 760                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R02 | 11R22.5 146/143K     | 16         | 20.0                    | 25.2 | 8.25         | 279                   | 1050                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R03 | 11R24.5 146/143K     | 14         | 20.0                    | 25.2 | 8.25         | 279                   | 1104                 | 760                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R04 | 11R24.5 149/146K     | 16         | 20.0                    | 25.2 | 8.25         | 279                   | 1104                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R05 | 295/75R22.5 144/141K | 14         | 20.0                    | 25.2 | 9.00         | 298                   | 1014                 | 760                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R06 | 295/75R22.5 146/143K | 16         | 20.0                    | 25.2 | 9.00         | 298                   | 1014                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R07 | 285/75R24.5 144/141L | 14         | 20.0                    | 25.2 | 8.25         | 280                   | 1050                 | 760                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| D2000R08 | 285/75R24.5 147/144L | 16         | 20.0                    | 25.2 | 8.25         | 280                   | 1050                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P13-14



# WH 1020



❶ Application: Steer Wheel for long distance, also can be used on Trailer Wheel.

❷ Suitable for high speed on good road surface application, with excellent durability, anti-side wear performance.


❸ Longer mileage, Lower noise, Good stone-picking prevention.



Smartway Certificated





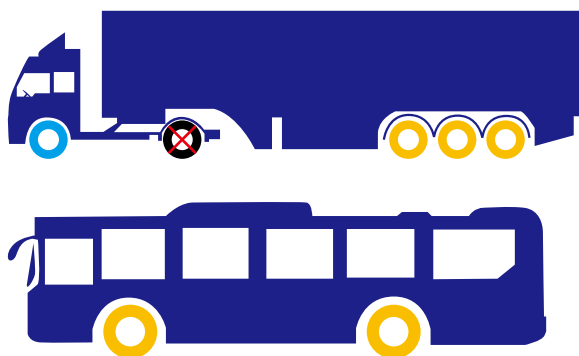

**Standard Wheel**

## ○ Permitted Wheel

**❌ Prohibited Wheel**

\* New Developing Sizes  
The labelling information is subject to change without notice.



# WD2020




❶ Application: Drive Wheel for medium mileage load series.

❷ Open Shoulder designs, the block pattern offer excellent drive force and anti-peeling performance on paved and unpaved roads.

❸ Excellent load capability, Longer mileage, Super Durability.

 **SmartWay**<sup>sm</sup>  
Smartway Certificated



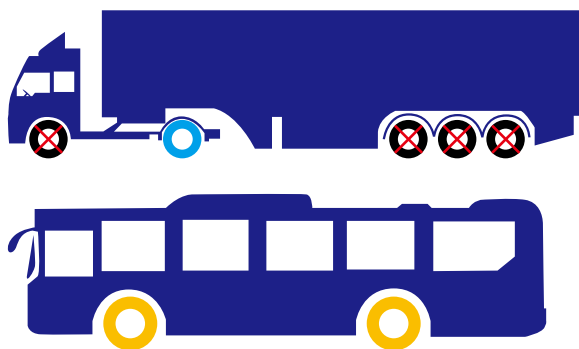

-  **Standard Wheel**
-  **Permitted Wheel**
-  **Prohibited Wheel**

\* New Developing Sizes  
The labelling information is subject to change without notice.





# WA 1060



- ❶ Application: All Position Wheels for On/Off use.
- ❷ Mixed pattern, Suitable for mixed road surface and relatively poor road condition with sideslip resistance.
- ❸ Excellent crack & tear resistance, High speed, Long mileage.



Smartway Certificated





**Standard Wheel**

### ○ Permitted Wheel

**❌ Prohibited Wheel**

\* New Developing Sizes

The labelling information is subject to change without notice.



# WD 2060



- ❶ Application: Drive Wheel for On/Off Road use.
- ❷ Suitable for mix road use and relatively poor road condition with excellent traction character.
- ❸ Excellent load capability, Longer mileage, Good anti-wearing.



Smartway Certificated







## M+S

 Standard Wheel

 Permitted Wheel

 Prohibited Wheel

| Item No. | Sizes Description | Ply Rating | Tread Depth |       | Standard Rim | Section Width (mm) | OA. Diameter (mm) | Max. Pressure (kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------|-------|--------------|--------------------|-------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          |                   |            | MM          | 1/32" |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| D2060R01 | 11R22.5 146/143K  | 16         | 20.0        | 25.2  | 8.25         | 279                | 1050              | 830                     | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2060R06 | 11R24.5 149/146K  | 16         | 20.0        | 25.2  | 8.25         | 282                | 1104              | 830                     | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2060R07 | 12.00R20 156/153J | 20         | 22.0        | 27.8  | 9.00         | 315                | 1225              | 830                     | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2060R08 | 12.00R24 160/157J | 20         | 22.0        | 27.8  | 9.00         | 315                | 1226              | 900                     | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes  
The labelling information is subject to change without notice.

# WT 3000



- 1 Application: Trailer Wheel for regional use.
- 2 Suitable for high and medium speed on good road surface with excellent anti-skid-side character and drainage performance.
- 3 Excellent loading capacity, Low rolling resistance, Low noise.



● Standard Wheel
 ● Permitted Wheel
 ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description      | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | O.A. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  | dB |
|----------|------------------------|------------|-------------------------|--------------|-----------------------|-----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----|
| T3000R03 | 215/75R17.5 135/133J   | 18         | 12.0 15.0               | 6.00         | 222                   | 761                   | 860                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R04 | 235/75R17.5 143/141J   | 18         | 12.5 15.8               | 6.75         | 242                   | 792                   | 875                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R05 | * 245/70R17.5 143/141J | 18         | 12.5 15.8               | 7.50         | 249                   | 781                   | 875                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R06 | 225/70R19.5 128/126M   | 14         | 12.5 15.8               | 6.75         | 225                   | 804                   | 760                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R07 | 245/70R19.5 136/134M   | 16         | 12.5 15.8               | 7.50         | 249                   | 832                   | 830                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R08 | 265/70R19.5 143/141J   | 18         | 13.5 17.0               | 7.50         | 259                   | 866                   | 850                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R09 | 285/70R19.5 150/148J   | 18         | 13.5 17.0               | 8.25         | 287                   | 888                   | 900                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R10 | 275/70R22.5 148/145M   | 16         | 14.5 18.2               | 8.25         | 276                   | 958                   | 900                        | C                                                                                     | D                                                                                     |  | 72 |
| T3000R02 | 385/55R22.5 160L       | 20         | 15.5 19.6               | 12.25        | 386                   | 996                   | 900                        | C                                                                                     | D                                                                                     |  | 73 |
| T3000R01 | 385/65R22.5 160L       | 20         | 15.5 19.6               | 11.75        | 389                   | 1072                  | 900                        | C                                                                                     | D                                                                                     |  | 73 |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

# WT 3020



- 1 Application: Trailer Wheel for regional use.
- 2 Suitable for high speed on paved road surface with excellent anti-skid-side character and durability performance.
- 3 Excellent loading capacity, Low rolling resistance, Low noise.



● Standard Wheel  
 ● Permitted Wheel  
 ✗ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" |      | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| T3020R01 | 385/65R22.5 160L  | 20         | 15.5                    | 19.6 | 11.75        | 389                   | 1072                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| T3020R02 | *425/65R22.5 165K | 20         | 16.0                    | 20.2 | 13.00        | 430                   | 1124                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P23-24



# WA 1062+



❶ Application: All Position Wheels for long mileage load series.

❷ New designed pattern, Suitable for well paved road condition with excellent durability.

❸ Standard load, Low heat build-up, High speed.



● Standard Wheel  
 ● Permitted Wheel  
 ✗ Prohibited Wheel

## M+S

| Item No.  | Sizes Description  | Ply Rating | Tread Depth<br>MM 1/32" |      | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|-----------|--------------------|------------|-------------------------|------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| A1062R01+ | 12.00R24 160/157K  | 20         | 16.0                    | 20.2 | 8.50         | 315                   | 1226                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| A1062R02+ | 325/95R24 162/160K | 22         | 15.5                    | 19.6 | 9.00         | 315                   | 1226                 | 850                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|           |                    |            |                         |      |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

# WD 2062+



① Application: Drive Wheel for medium mileage load series.

② Open Shoulder designs, the block pattern offer excellent drive force and anti-peeling performance on paved and unpaved roads.

③ Excellent load capability, Longer mileage, Super Durability.



● Standard Wheel ● Permitted Wheel ❌ Prohibited Wheel

## M+S

| Item No.  | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|-----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| D2062R05  | 7.50R16 122/118K  | 14         | 14.5 18.2               | 6.50         | 216                   | 803                  | 770                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2062R06  | 8.25R16 128/124K  | 16         | 14.5 18.2               | 6.50         | 230                   | 850                  | 770                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2062R01  | 9.00R20 144/142J  | 16         | 17.5 22.0               | 7.00         | 259                   | 1019                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2062R02  | 10.00R20 149/146K | 18         | 18.0 22.6               | 7.50         | 278                   | 1054                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2062R03+ | 11.00R20 152/149J | 18         | 18.5 23.4               | 8.00         | 293                   | 1085                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2062R04+ | 12.00R20 156/153J | 20         | 19.0 24.0               | 8.50         | 315                   | 1125                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P25-26

# WH 1022



① Application: Steer Wheel for long distance, also can be used on Trailer Wheel.

② Suitable for high speed on good road surface application, with excellent durability, anti-side wear performance.

③ Longer mileage, Lower noise, Good stone-picking prevention.



● Standard Wheel ● Permitted Wheel ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description    | Ply Rating | Tread Depth |       | Standard Rim | Section Width (mm) | OA. Diameter (mm) | Max. Pressure (kpa/PSI) |  |  |  | dB |
|----------|----------------------|------------|-------------|-------|--------------|--------------------|-------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----|
|          |                      |            | MM          | 1/32" |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
| H1022R01 | 315/80R22.5 156/150K | 20         | 15.0        | 19.0  | 9.00         | 312                | 1076              | 850                     | -                                                                                     | -                                                                                     | -                                                                                     | -  |
| H1022R02 | 9.5R17.5 143/141J    | 18         | 13.5        | 17.0  | 6.75         | 240                | 842               | 875                     | -                                                                                     | -                                                                                     | -                                                                                     | -  |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |
|          |                      |            |             |       |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |    |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres



# WD 2028



- ❶ Application: Drive Wheel for short distance on/off road use.
- ❷ Suitable for low or middle speed ride on/off road condition, with powerful grip and high loading ability.
- ❸ Longer Mileage, Strong Structure, Good anti-wear performance.



● Standard Wheel   
 ● Permitted Wheel   
 ❌ Prohibited Wheel

## M+S

| Item No. | Sizes Description    | Ply Rating | Tread Depth<br>MM 1/32" |      | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |   |   |   | dB |
|----------|----------------------|------------|-------------------------|------|--------------|-----------------------|----------------------|----------------------------|---|---|---|----|
| D2028R01 | 315/80R22.5 156/150K | 20         | 18.0                    | 22.6 | 9.00         | 312                   | 1076                 | 850                        | - | - | - | -  |
| D2028R02 | 9.5R17.5 143/141J    | 18         | 15.0                    | 19.0 | 6.75         | 240                   | 842                  | 875                        | - | - | - | -  |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |      |              |                       |                      |                            |   |   |   |    |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P27-28

# WD 2040



- ❶ Application: Drive Wheel for short distance on/off road use.
- ❷ Suitable for low or middle speed ride on/off road condition, with powerful grip and high loading ability.
- ❸ Longer Mileage, Strong Structure, Good anti-wear performance.



● Standard Wheel   
 ● Permitted Wheel   
 ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  | dB |
|----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----|
| D2040R01 | 10.00R20 149/146k | 18         | 20.0 25.2               | 7.50         | 278                   | 1054                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -  |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |    |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

# WD 2048



- ❶ Application: Drive Wheel for short distance on/off road use.
- ❷ Suitable for low or middle speed ride on/off road condition, with powerful grip and high loading ability.
- ❸ Longer Mileage, Strong Structure, Good anti-wear performance.



● Standard Wheel   
 ● Permitted Wheel   
 ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description    | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |   |   |   | dB |
|----------|----------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---|---|---|----|
| D2048R01 | 12R22.5 152/149K     | 18         | 18.0 22.6               | 9.00         | 300                   | 1084                 | 930                        | - | - | - | -  |
| D2048R02 | 315/80R22.5 156/150K | 20         | 18.0 22.6               | 9.00         | 312                   | 1076                 | 850                        | - | - | - | -  |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |
|          |                      |            |                         |              |                       |                      |                            |   |   |   |    |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P29-30



# WA 1068



- ① Application: All Position Wheels for long mileage load series.
- ② New designed pattern, Suitable for well paved road condition with excellent durability.
- ③ Standard load, Low heat build-up, High speed.



● Standard Wheel  
 ● Permitted Wheel  
 ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| A1068R01 | 12.00R24 160/157K | 20         | 16.0 20.2               | 8.50         | 315                   | 1226                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes  
 The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

# WD 2068



- ❶ Application: Drive Wheel for short distance on/off road use.
- ❷ Suitable for low or middle speed ride on/off road condition, with powerful grip and high loading ability.
- ❸ Longer Mileage, Strong Structure, Good anti-wear performance.



● Standard Wheel   
 ● Permitted Wheel   
 ✗ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| D2068R01 | 12.00R24 160/157K | 20         | 16.5 20.8               | 8.50         | 315                   | 1226                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P31-32

# WA 1088



① Application: Steer Wheel for long distance, also can be used as All Position pattern.

② New designed pattern, Suitable for well paved road condition with high speed level and excellent durability.

③ Heavy loading capacity, Low heat build-up, High speed and Low noise.



● Standard Wheel ● Permitted Wheel ❌ Prohibited Wheel

## M+S

| Item No. | Sizes Description  | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | O.A. Diameter<br>(mm) | Max. Pressure<br>(Kpa/PSI) |  |  |  |  |
|----------|--------------------|------------|-------------------------|--------------|-----------------------|-----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| A1088R01 | *9.00R20 144/142K  | 16         | 15.5 19.5               | 7.00         | 259                   | 1019                  | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| A1088R02 | *10.00R20 149/146K | 18         | 16.0 20.2               | 7.50         | 278                   | 1054                  | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| A1088R03 | 11.00R20 152/149K  | 18         | 16.5 20.8               | 8.00         | 293                   | 1085                  | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| A1088R04 | 12.00R20 156/153K  | 20         | 17.0 21.4               | 8.50         | 315                   | 1125                  | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres



# WD 2088



① Application: Drive Wheel for short distance on mining and construction areas.

② Suitable for low speed ride on bad road condition, specially for mining area, with powerful grip and high loading ability.

③ Longer Mileage, Strong Structure, Good anti-wear performance.



● Standard Wheel ● Permitted Wheel ✗ Prohibited Wheel

## M+S

| Item No. | Sizes Description      | Ply Rating | Tread Depth<br>MM 1/32" |      | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(Kpa/PSI) |  |  |  |  |
|----------|------------------------|------------|-------------------------|------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| D2088R01 | 11.00R20 152/149G      | 18         | 22.0                    | 27.8 | 8.00         | 293                   | 1085                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R02 | 12.00R20 156/153G      | 20         | 24.0                    | 30.2 | 8.50         | 315                   | 1125                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R03 | 11R22.5 146/143G       | 16         | 22.0                    | 27.8 | 8.25         | 279                   | 1050                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R04 | 295/80R22.5 152/149G   | 18         | 22.0                    | 27.8 | 9.00         | 298                   | 1044                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R05 | 12R22.5 152/149G       | 18         | 22.0                    | 27.8 | 9.00         | 300                   | 1084                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R06 | * 315/80R22.5 156/150G | 20         | 22.0                    | 27.8 | 9.00         | 312                   | 1076                 | 850                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R07 | 13R22.5 154/151G       | 18         | 22.0                    | 27.8 | 9.75         | 320                   | 1124                 | 875                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R08 | *12.00R24 158/155G     | 18         | 24.0                    | 30.2 | 9.00         | 315                   | 1226                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2088R09 | *11R24.5 149/146G      | 16         | 22.0                    | 27.8 | 8.25         | 282                   | 1104                 | 830                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P33-34

# WA 1066



- ❶ Application: All Position Wheels for On/Off use.
- ❷ Mixed pattern, Suitable for mixed road surface and relatively poor road condition with high loading capability.
- ❸ Excellent crack & tear resistance, Good anti-uneven wear character.



● Standard Wheel   
 ● Permitted Wheel   
 ✗ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" |      | Standard Rim | Section Width (mm) | OA. Diameter (mm) | Max. Pressure (kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|------|--------------|--------------------|-------------------|-------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| A1066R01 | 11.00R20 152/149K | 18         | 16.0                    | 20.2 | 8.00         | 293                | 1085              | 930                     | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| A1066R02 | 12.00R20 156/153K | 20         | 16.5                    | 20.8 | 8.50         | 315                | 1125              | 900                     | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |      |              |                    |                   |                         |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

# WD 2066



- ❶ Application: Drive Wheel for short distance on/off road use.
- ❷ Suitable for low or middle speed ride on/off road condition, with powerful grip and high loading ability.
- ❸ Longer Mileage, Strong Structure, Good anti-wear performance.



● Standard Wheel    ● Permitted Wheel    ❌ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| D2066R01 | 11.00R20 152/149J | 18         | 18.5 23.4               | 8.00         | 293                   | 1085                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| D2066R02 | 12.00R20 156/153J | 20         | 19.0 24.0               | 8.50         | 315                   | 1125                 | 900                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P35-36



# WA 1082



- ❶ Application: All Position Wheels for On/Off use.
- ❷ Mixed pattern, Suitable for mixed road surface and relatively poor road condition with high loading capability.
- ❸ Excellent crack & tear resistance, Good anti-uneven wear character.



● Standard Wheel   
 ● Permitted Wheel   
 ⊗ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| A1082R01 | 12R22.5 152/149L  | 18         | 18.0 22.6               | 9.00         | 300                   | 1084                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
| A1082R02 | 11.00R20 152/149L | 18         | 17.0 22.0               | 8.00         | 293                   | 1085                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     | -                                                                                     |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

# WD 2082



❶ Application: Drive Wheel for medium mileage load series.

❷ Open Shoulder designs, the block pattern offer excellent drive force and anti-peeling performance on paved and unpaved roads.

❸ Excellent load capability, Longer mileage, Super Durability.



● Standard Wheel ● Permitted Wheel ❌ Prohibited Wheel

## M+S

| Item No. | Sizes Description | Ply Rating | Tread Depth<br>MM 1/32" | Standard Rim | Section Width<br>(mm) | OA. Diameter<br>(mm) | Max. Pressure<br>(Kpa/PSI) |  |  |  |  |
|----------|-------------------|------------|-------------------------|--------------|-----------------------|----------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| D2082R01 | 12R22.5 152/149L  | 18         | 18.0 22.6               | 9.00         | 300                   | 1084                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     |                                                                                       |
| D2082R02 | 11.00R20 152/149L | 18         | 17.0 22.0               | 8.00         | 293                   | 1085                 | 930                        | -                                                                                     | -                                                                                     | -                                                                                     |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|          |                   |            |                         |              |                       |                      |                            |                                                                                       |                                                                                       |                                                                                       |                                                                                       |

\* New Developing Sizes

The labelling information is subject to change without notice.

Enjoy your Trips with **WINDFORCE** Tyres

P37-38



***WINDFORCE TYRE CO., LIMITED***

***DIRECT SALES OFFICE OF HAOHUA TIRE***

***DISTRIBUTED BY***

